

*liper*

2025. 03



## PHÂN PHỐI ĐỘC QUYỀN TẠI VIỆT NAM



### TRỤ SỞ HỒ CHÍ MINH

527 Nguyễn Oanh, Phường 17, Quận Gò Vấp

Tel.: + (8428) 39841657- 39841658

Hotline: 0777.06.4444 - 0772.266.622

### CHI NHÁNH HÀ NỘI

Căn L7~84 Khu Đô Thị Mới Đại Kim - Đại Kim - Hoàng Mai

Tel.: +(8424) 39729306

Hotline: 090 244 3484

### CHI NHÁNH ĐÀ NẴNG

441 Bùi Trang Chước Phường Hoà Xuân, Quận Cẩm Lệ, Đà Nẵng

Tel: (8423) 66 503 355

Hotline: 0786 334 343

Established in Germany in 1912...



**LED**



Das einzige unveränderliche Thema - Qualität

Brilliant light,  
the unique eternal topic-----  
quality.

***liper***

ESTABLISHED IN GERMANY IN 1912








## Firmenprofil >>>

### COMPANY PROFILE

Zhejiang Liper Beleuchtungstechnik AG(Kurze Einführung)

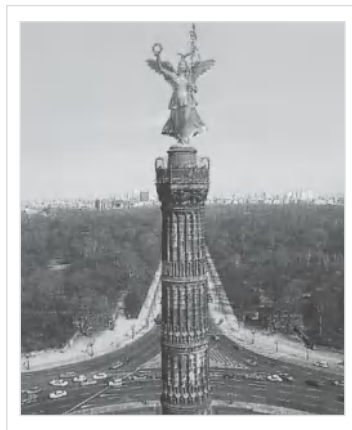

Im Dezember 2015 etablierten Liper Elektrogeräte GmbH in Deutschland und Zhejiang Liper Beleuchtungstechnik AG offiziell eine strategische Partnerschaft. Deutsche Führungskräfte und chinesische Vertreter unterzeichneten eine strategische Kooperationsvereinbarung in Deutschland. Die beiden Seiten beginnen mit der vielseitigen Zusammenarbeit, was signalisiert, dass Liper Beleuchtungstechnik AG zu einer neuen Etappe gegangen ist. Ein Flugzeugträger in internationaler Beleuchtungsindustrie wird bald abfahren.....

Wir werden die Vorteile der deutschen Industrietechnologie und den kontinuierlich verbesserten germanischen Geist voll integrieren, um ausgezeichnete Leistungen und nachhaltige Entwicklung zu erzielen und die ganzheitlichen Beleuchtungslösungen mit Weltrang für die weltweite kommerzielle Beleuchtung, Innenbeleuchtung und Außenbeleuchtung zu bieten. Dies ist eine Erweiterung des beidseitigen strategischen Layout. Darüber hinaus werden das neue Zusammenarbeitsmodell und die Strategie tiefgreifende Auswirkungen auf LED-Beleuchtungsindustrie haben.

Nach jahrelangen Entwicklungen hat Liper Beleuchtungstechnik AG sich zu einem globalen Beleuchtungsgeschäft entwickelt, was Forschung und Entwicklung, Produktion sowie Vertrieb integriert und mehr als 2.000 bestehende Mitarbeiter hat. Das Unternehmen hält sich an das "menschenorientierte" Entwicklungskonzept und legt großen Wert auf die Errichtung des Talentteams, technologische Talente kraftvoll einzuführen und zu trainieren. Das Unternehmen führt die deutschen fortschrittlichen Technologien und Ausrüstungen umfassend ein und errichtet F&E-Zentrum und Laborator auf nationaler Ebene. Es hat ein professionelles Team zum Management vom Betrieb, dessen Produkte auf der ganzen Welt verkauft werden. Zudem gründet es Niederlassungen und Geschäftsstellen in Europa, Mittlerem Osten, Südamerika, Südostasien, Afrika und anderen Regionen.

Durch die Zusammenarbeit zwischen Liper Beleuchtungstechnik AG und Liper Elektrogeräte GmbH in Deutschland, werden die beide Seiten ihre jeweiligen professionellen Vorteile im Produktionsmanagement und technischen Bereich voll integrieren, die Zusammenarbeit in F & E und Produkt durchzuführen, während in Markt, Kanal und Vertrieb zusammenzuarbeiten. Die "Liper Beleuchtung" entwickelt sich zum globalen Beleuchtungsgeschäft und zur führenden Beleuchtungsmarke Chinas. Bei der Gestaltung der internationalen Marke engagiert das Liper-Personal sich immer für die Gesinnung eines grünen, harmonischen, energiesparenden und kohlenstoffarmen neuen Lebens, um eine bessere Beleuchtungsumgebung für die ganze Welt zu schaffen und das Leben jeden Tag zu beleuchten!

**Liper lässt die Welt energiesparender!**

### Zhejiang Liper Lighting Technology Co., Ltd

By officially reaching a strategic partnership on December 2015 upon signing of a strategic cooperation agreement between top leaders of the German company and representatives of its Chinese counterpart in Germany, Germany Liper Electric Co., Ltd and Zhejiang Liper Lighting Technology Co., Ltd have conducted all-round cooperation, marking a new stage of Liper's development. An aircraft carrier in the international lighting industry is about to set sail.....

We will fully integrate the German superior industrial technologies and improve German spirits to achieve excellence in performance and sustainable development, so as to provide world first-class integrated lighting solutions for the global commercial lighting, indoor lighting and outdoor lighting. It is not only an extension of the strategic layout of the two sides, but the new cooperation pattern and strategy will bring a far-reaching impact on the LED lighting industry.

After years of development, Liper now has grown into a global lighting enterprise engaged in product R & D, production and sales. The company currently employs more than 2000 people and attaches great importance to the establishment of high-quality talent team with great efforts made to introduce and cultivate talents of science and technology, under the "people-oriented" development philosophy. By widely introducing a full set of advanced technologies and equipment from Germany, setting up a state-level R & D center and laboratory, and putting business under management of the professional team, the company has exported its products to markets throughout the world with subsidiaries and offices in Europe, the Middle East, South America, Southeast Asia, Africa and other regions.

Based on business cooperation, Liper and Germany Liper will fully integrate their professional advantages in production management and technology for cooperation in R & D and products as well as in the fields of marketing, channels and sales, so that Liper will grow into a global lighting company as the leader brand in Chinese lighting industry. In shaping an international brand, Liper workers are still committed to promoting new views of green, harmonious, energy saving and low-carbon life, to create a better light environment for the world and light the life every day!

**Liper make the world more energy saving!**





Gruppenfoto von Vorstandsvorsitzender Herr Wang Renle und Staatspräsident  
Board Chairman Mr.Wang Renle take group photo with Chinese former and current president



Links vierte in der zweiten Reihe  
The second row of the fourth on the left



Rechts erst in der zweiten Reihe  
The second row of the first on the right

# Contents



**LED FLOOD LIGHT** 001–012



**LED STREET LIGHT** 013–020



**LED SOLAR LIGHT** 021-034



**LED UFO LIGHT** 035-038



**LED LAMP** 039-042



**LED STEP LIGHT** 043-044



**LED WALL LIGHT** 045–048



**LED DOWN LIGHT** 049–090



**LED TRACK LIGHT** 091–096



**LED LOUVER FITTING** 097–098



**LED TUBE** 099–105



**LED STRIP LIGHT** 106–107



**LED MAGNETIC TRACK LIGHT** 108–112

Brilliant light,  
the unique eternal topic-----  
quality.





LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-20BT01     | 20W               | 2000-2080LM    | N                  | 114x90x29mm                  |
| LPFL-30BT01     | 30W               | 3000-3080LM    | N                  | 136X118X29mm                 |
| LPFL-50BT01     | 50W               | 5000-5080LM    | N                  | 175X152X29mm                 |
| LPFL-100BT01    | 100W              | 10000-10500LM  | N                  | 236x202x32mm                 |
| LPFL-200BT01    | 200W              | 20000-20500LM  | N                  | 301X251X35mm                 |
| LPFL-300BT01    | 300W              | 30000-30500LM  | N                  | 330x302x35mm                 |

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-20BT02     | 20W               | 2000-2080LM    | N                  | 114x90x29mm                  |
| LPFL-30BT02     | 30W               | 3000-3080LM    | N                  | 136X118X29mm                 |
| LPFL-50BT02     | 50W               | 5000-5080LM    | N                  | 175X152X29mm                 |
| LPFL-100BT02    | 100W              | 10000-10500LM  | N                  | 236x202x32mm                 |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-200BT02    | 200W              | 20000-20500LM  | N                  | 301X251X35mm                 |
| LPFL-300BT02    | 300W              | 30000-30500LM  | N                  | 330x302x35mm                 |
| LPFL-400BT02    | 400W              | 40000-40500LM  | N                  | 485x385x66mm                 |
| LPFL-500BT02    | 500W              | 50000-50500LM  | N                  | 485x385x66mm                 |

Material

High Quality Aviation  
Aluminum

Color Temperature





BF SERIES  
LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-50BF01      | 50W               | 4000-4050LM    | N                  | 140X160X46mm                 |
| LPFL- 80BF01     | 80W               | 6400-6480LM    | N                  | 220X202X51mm                 |
| LPFL-50BF01-CCT  | 50W               | 4000-4050LM    | N                  | 140X160X46mm                 |
| LPFL- 80BF01-CCT | 80W               | 6400-6480LM    | N                  | 220X202X51mm                 |

Color Temperature



BS SERIES  
LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-10BS01     | 10W               | 1000-1080LM    | N                  | 117X31X107mm                 |
| LPFL-20BS01     | 20W               | 2000-2080LM    | N                  | 117X31X107mm                 |
| LPFL-30BS01     | 30W               | 3000-3080LM    | N                  | 156X144X33mm                 |
| LPFL-50BS01     | 50W               | 5000-5080LM    | N                  | 199X36X160mm                 |
| LPFL-70BS01     | 70W               | 7000-7080LM    | N                  | 255X50X240mm                 |
| LPFL-100BS01    | 100W              | 10000-10500LM  | N                  | 331X50X280mm                 |
| LPFL-150BS01    | 150W              | 15000-15500LM  | N                  | 331X62X280mm                 |
| LPFL-200BS01    | 200W              | 20000-20500LM  | N                  | 331X88X280mm                 |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-10BS01-G   | 10W               | 1000-1080LM    | N                  | 167X55X107mm                 |
| LPFL-20BS01-G   | 20W               | 2000-2080LM    | N                  | 167X55X107mm                 |
| LPFL-30BS01-G   | 30W               | 3000-3080LM    | N                  | 202X56X156mm                 |
| LPFL-50BS01-G   | 50W               | 5000-5080LM    | N                  | 225X60X198mm                 |

Color Temperature







XT SERIES  
LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-10XT01     | 10W               | 1000-1080LM    | N                  | 105X30X100mm                 |
| LPFL-20XT01     | 20W               | 2000-2080LM    | N                  | 124X30X114mm                 |
| LPFL-30XT01     | 30W               | 3000-3080LM    | N                  | 154X32X138mm                 |
| LPFL-50XT01     | 50W               | 5000-5080LM    | N                  | 205X32X175mm                 |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-100XT01    | 100W              | 10000-10500LM  | N                  | 280X34X258mm                 |
| LPFL-150XT01    | 150W              | 15000-15500LM  | N                  | 320X38X280mm                 |

Material

High Quality Aviation  
Aluminum

Color Temperature




X SERIES  
LED FLOOD LIGHT



IP66



200W

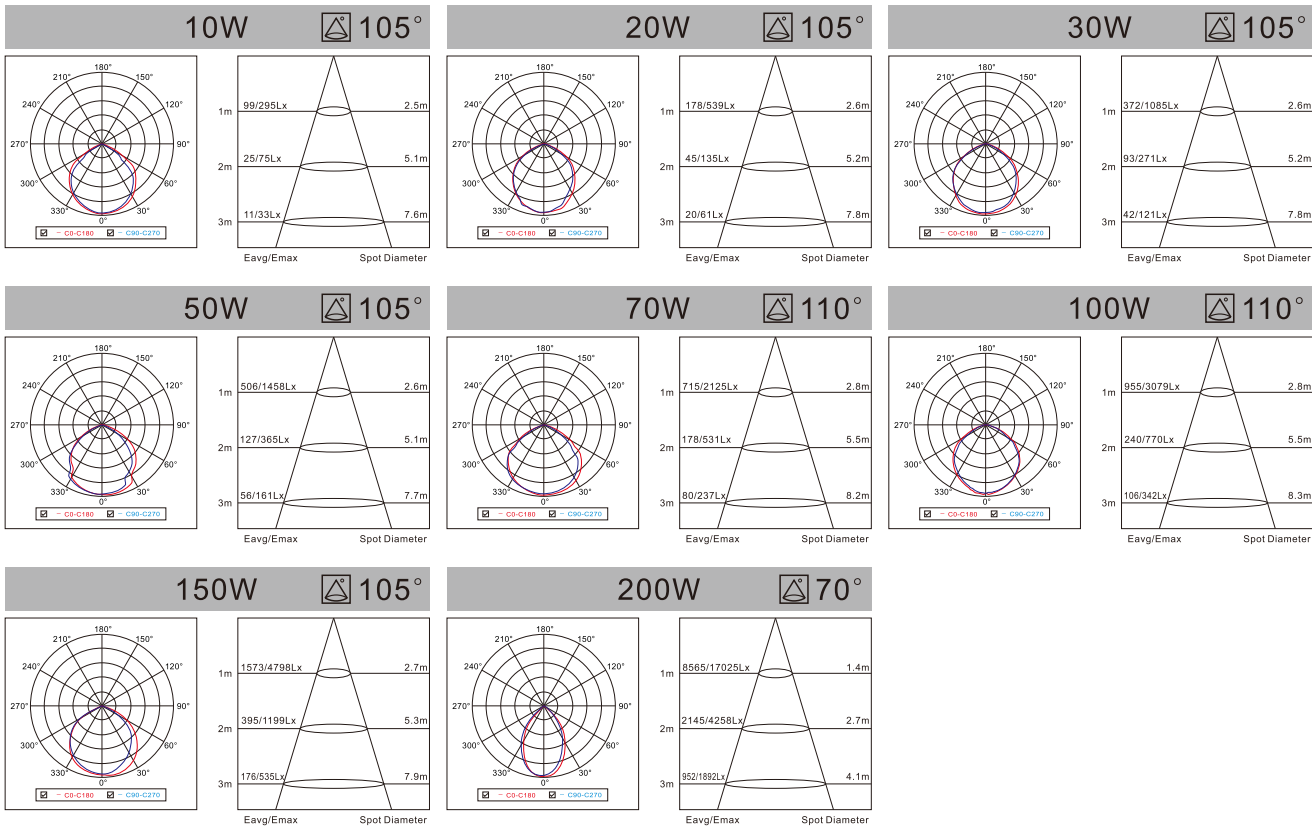

Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-10X01      | 10W               | 890-950LM      | N                  | 137X32X118mm                 |
| LPFL-20X01      | 20W               | 1720-1810LM    | N                  | 180X37X187mm                 |
| LPFL-30X01      | 30W               | 2650-2730LM    | N                  | 193X37X197mm                 |
| LPFL-50X01      | 50W               | 4120-4200LM    | N                  | 258X42X257mm                 |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-100X01     | 100W              | 9150-9350LM    | N                  | 261X59X268mm                 |
| LPFL-150X01     | 150W              | 14100-14380LM  | N                  | 285X65X285mm                 |
| LPFL-200X01     | 200W              | 18800-19200LM  | N                  | 345X70X370mm                 |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-200X01     | 200W              | 20000-21000LM  | N                  | 345X110X375mm                |
| LPFL-400X01     | 400W              | 40000-41000LM  | N                  | 405X105X430mm                |






**LED FLOOD LIGHT**  
Long Lifetime High Lumen Efficiency High CRI  
Good Heat Dissipation No Radiation Energy Saving  
**IP66**  
50W/100W/150W/200W/250W/400W/500W/600W

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-50MS01     | 50W               | 4980-5120LM    | N                  | 295X70X138mm                 |
| LPFL-100MS01    | 100W              | 10560-11380LM  | N                  | 295X70X268mm                 |
| LPFL-150MS01    | 150W              | 14800-15500LM  | N                  | 298X73X378mm                 |
| LPFL-200MS01    | 200W              | 20800-21500LM  | N                  | 298X73X490mm                 |

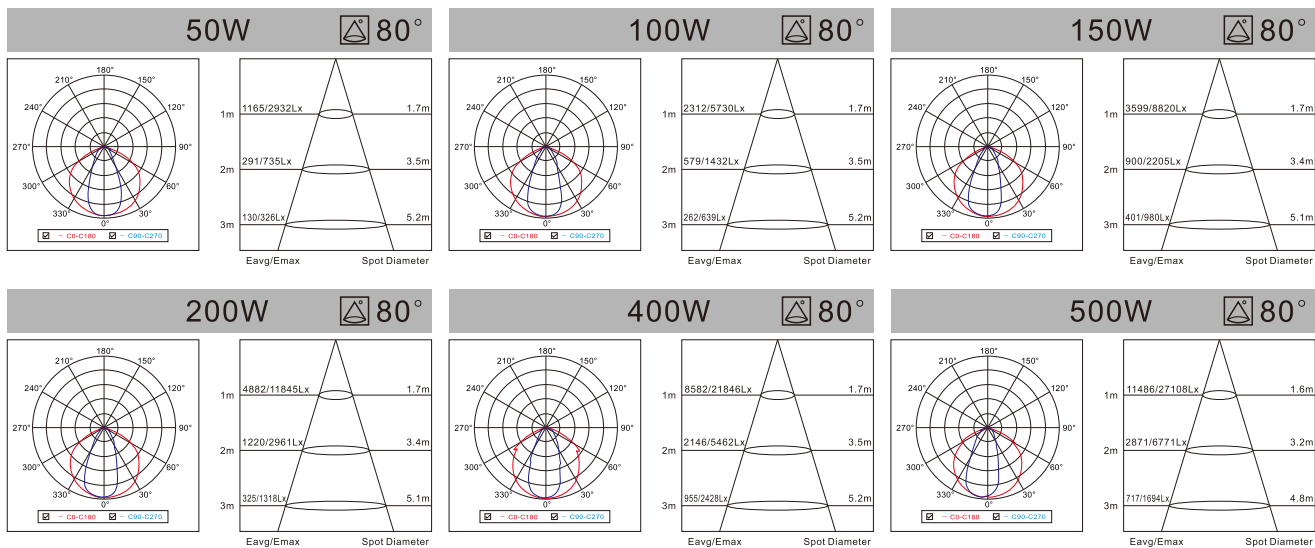

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPFL-300MS01    | 300W              | 28900-29600LM  | N                  | 573X73X378mm                 |
| LPFL-400MS01    | 400W              | 39500-40200LM  | N                  | 573X73X490mm                 |
| LPFL-500MS01    | 500W              | 48600-49700LM  | N                  | 573X73X600mm                 |
| LPFL-600MS01    | 600W              | 58800-59500LM  | N                  | 573X73X710mm                 |



Material  
High Quality Aviation Aluminum

Color Temperature  
Warm White  
Cool White  
Natural White







A/B SERIES  
LED GRASS LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPGSL-07A01-Y   | 7W                | 525-595LM      | N                  | 70X90mm                      |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPGSL-10B01     | 10W               | 900LM          | N                  | 103x89x70mm                  |
| LPGSL-20B01     | 20W               | 1800LM         | N                  | 152x129x84mm                 |
| LPGSL-30B01     | 30W               | 2700LM         | N                  | 192x162x95mm                 |



Material

High Quality Aviation  
Aluminum

Color Temperature



HW SERIES  
LED WORK LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|---------------------------------------|--------------------|------------------------------|
| LPWK-100HW01    | 100W              | 3.7V/4400mAh                          | N                  | 340x282x70mm                 |
| LPWK-200HW01    | 200W              | 3.7V/8800mAh                          | N                  | 400x312x70mm                 |

Color Temperature







LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h



IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter |
|-----------------|-------------------|----------------|--------------------|------------------------------|--------------------------------------------------------|
| LPSTL-50G01     | 50W               | 5130-6270LM    | N                  | 395x108x47mm                 | Ø 50/60mm                                              |
| LPSTL-100G01    | 100W              | 10260-12540LM  | N                  | 458x120x49mm                 | Ø 50/60mm                                              |
| LPSTL-150G01    | 150W              | 15390-18810LM  | N                  | 563x159x62mm                 | Ø 50/60mm                                              |
| LPSTL-200G01    | 200W              | 20520-25080LM  | N                  | 650x173x62mm                 | Ø 50/60mm                                              |

Material

High Quality Aviation  
Aluminum

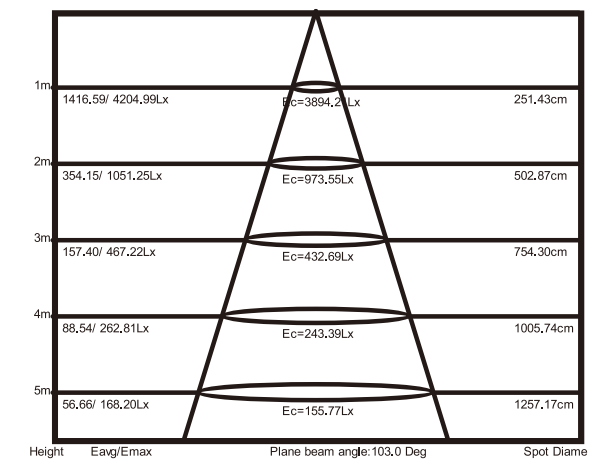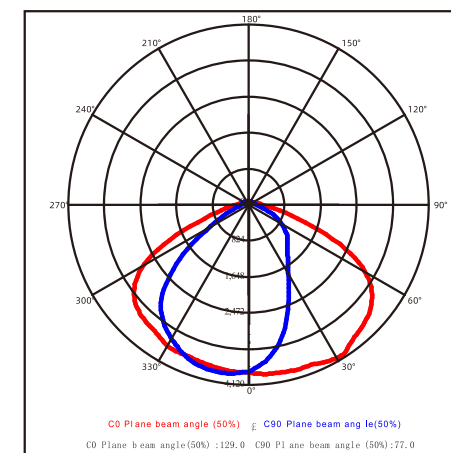

Color Temperature

Warm White



Cool White



Natural White







LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66





| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter |
|-----------------|-------------------|----------------|--------------------|------------------------------|--------------------------------------------------------|
| LPSTL-50GS01    | 50W               | 5130-6270LM    | N                  | 470x107x92mm                 | Ø 50/60mm                                              |
| LPSTL-100GS01   | 100W              | 10260-12540LM  | N                  | 535x120x92mm                 | Ø 50/60mm                                              |
| LPSTL-150GS01   | 150W              | 15390-18810LM  | N                  | 604x159x92mm                 | Ø 50/60mm                                              |
| LPSTL-200GS01   | 200W              | 20520-25080LM  | N                  | 693x173x92mm                 | Ø 50/60mm                                              |

Material

High Quality Aviation  
Aluminum

Color Temperature

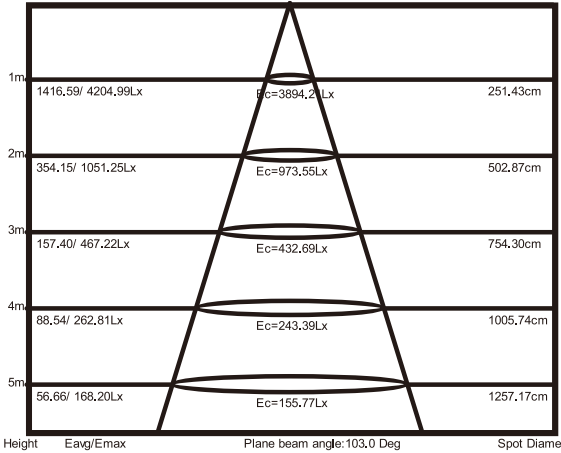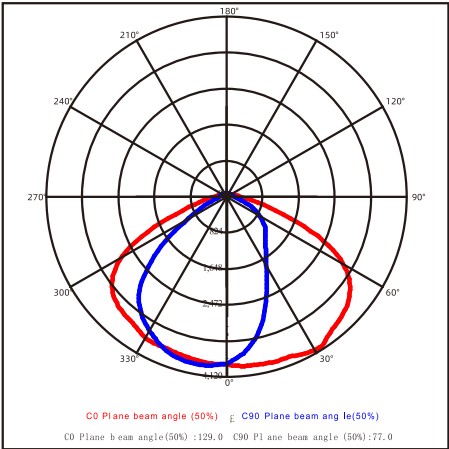






LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter |
|-----------------|-------------------|----------------|--------------------|------------------------------|--------------------------------------------------------|
| LPSTL-20C01     | 20W               | 1900-2200LM    | N                  | 282X55X144mm                 | Ø 50mm                                                 |
| LPSTL-30C01     | 30W               | 2850-3300LM    | N                  | 282X55X144mm                 | Ø 50mm                                                 |
| LPSTL-50C01     | 50W               | 4750-5500LM    | N                  | 383X67X190mm                 | Ø 50mm                                                 |
| LPSTL-100C01    | 100W              | 9500-11000LM   | N                  | 490X85X225mm                 | Ø 50/60mm                                              |
| LPSTL-100C01-G  | 100W              | 9500-11000LM   | N                  | 490X158X225mm                | Ø 50/60mm                                              |
| LPSTL-150C01    | 150W              | 14250-16500LM  | N                  | 600X95X272mm                 | Ø 50/60mm                                              |
| LPSTL-200C01    | 200W              | 19000-22000LM  | N                  | 643X120X293mm                | Ø 50/60mm                                              |

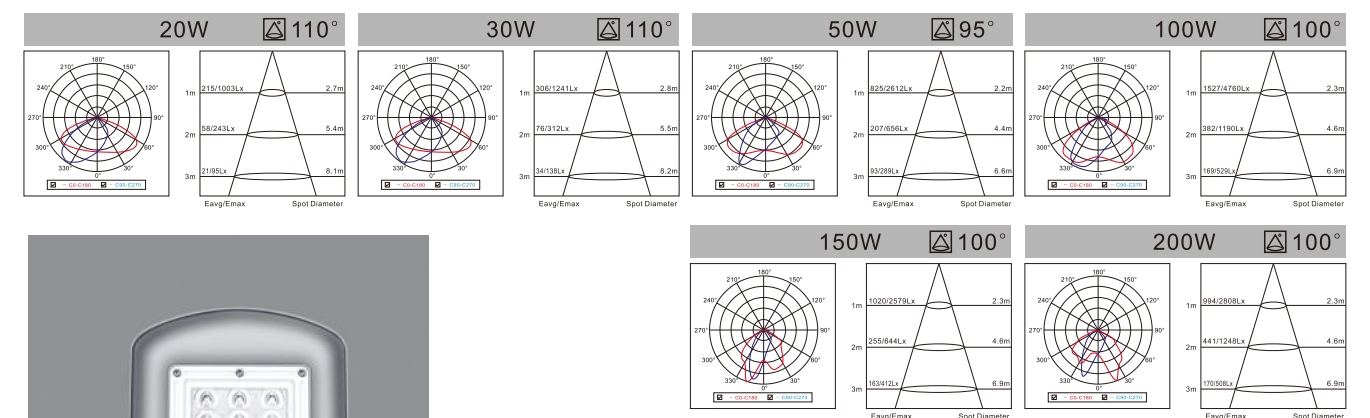

Material

High Quality Aviation  
Aluminum

Color Temperature

Warm White




Cool White




Natural White



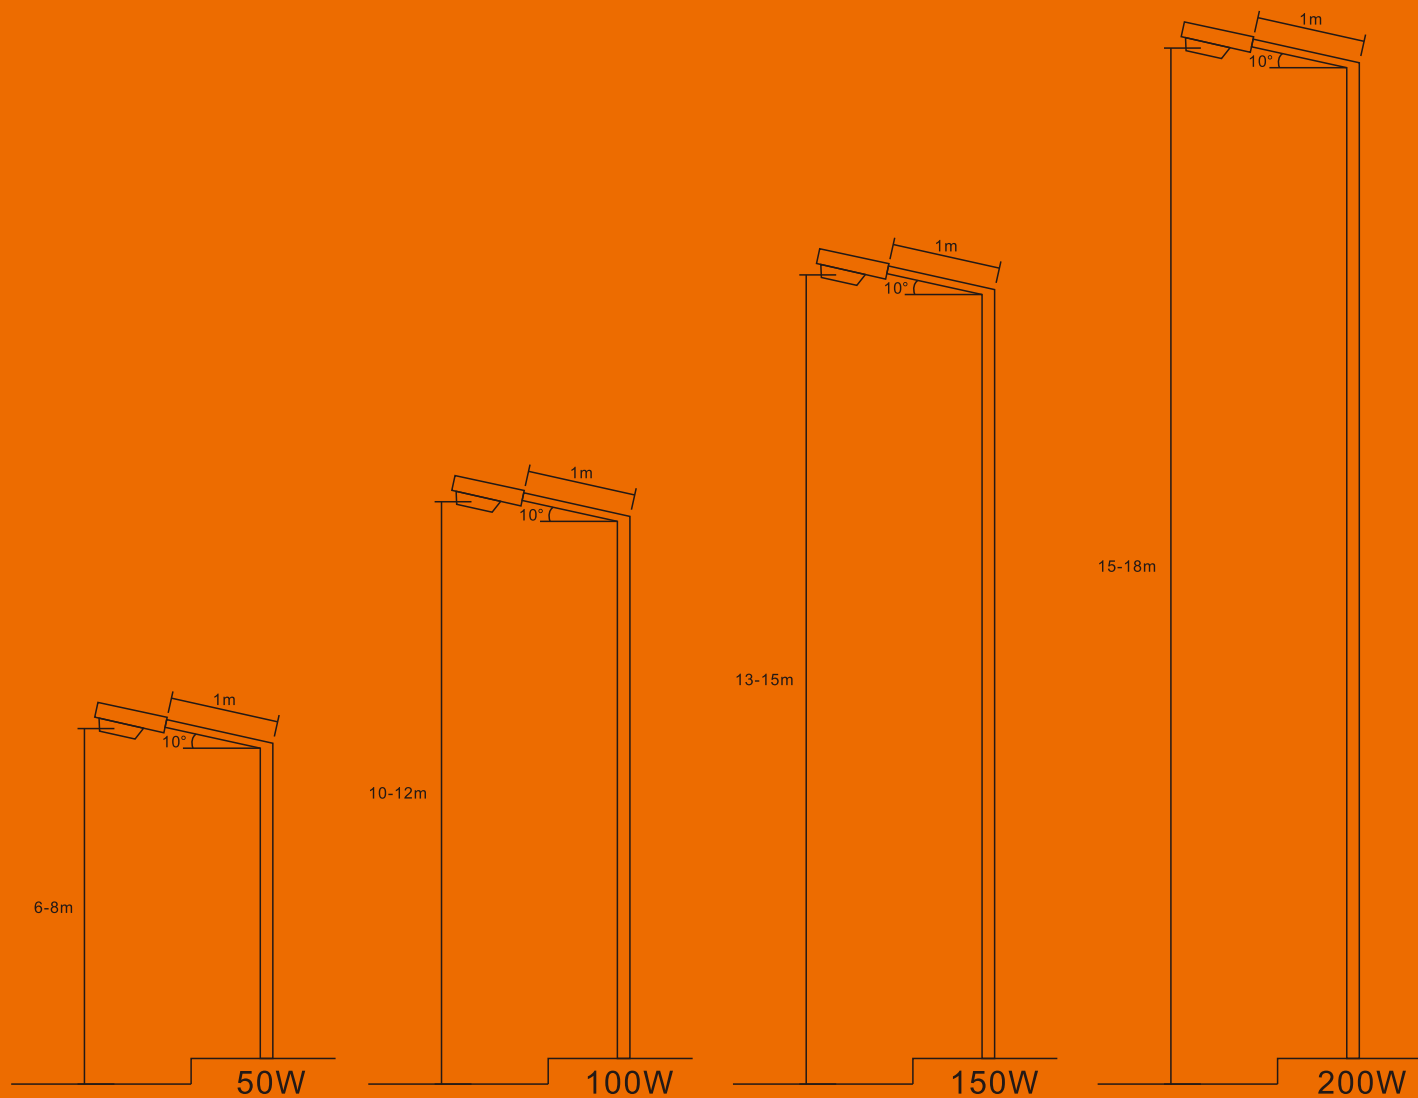


THE WIDTH OF THE ROAD 6-8M




A

THE WIDTH OF THE ROAD 6-8M




B

THE WIDTH OF THE ROAD 6-8M



C

THE WIDTH OF THE ROAD 6-8M



D

| RECOMMENDED SPACING OF STREET LIGHTS |        |        |        |        | ROAD REFERENCE DATASHEET |       |       |       |       |
|--------------------------------------|--------|--------|--------|--------|--------------------------|-------|-------|-------|-------|
|                                      | A      | B      | C      | D      | Lm(cd/m²)                | Uo    | U1    | TI[%] | EIR   |
| 50W                                  | 18-21m | 18-21m | 30-36m | 32-38m | ≥0.75                    | ≥0.40 | ≥0.60 | ≤15   | ≥0.30 |
| 100W                                 | 30-36m | 30-36m | 52-68m | 57-63m |                          |       |       |       |       |
| 150W                                 | 42-48m | 42-48m | 57-63m | 57-63m |                          |       |       |       |       |
| 200W                                 | 45-51m | 45-51m | 57-63m | 57-63m |                          |       |       |       |       |



LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter |
|-----------------|-------------------|----------------|--------------------|------------------------------|--------------------------------------------------------|
| LPSTL-50A01     | 50W               | 3800-4360LM    | N                  | 373X80X300mm                 | Ø 50/60mm                                              |
| LPSTL-100A01    | 100W              | 9200-9560LM    | N                  | 565X80X300mm                 | Ø 50/60mm                                              |
| LPSTL-150A01    | 150W              | 12600-13350LM  | N                  | 757X80X300mm                 | Ø 50/60mm                                              |
| LPSTL-200A01    | 200W              | 17500-18200LM  | N                  | 950X80X300mm                 | Ø 50/60mm                                              |

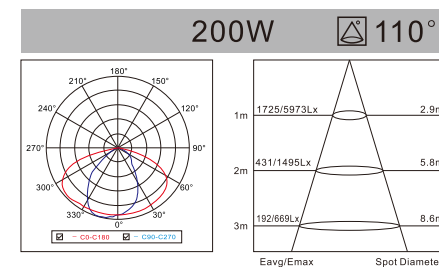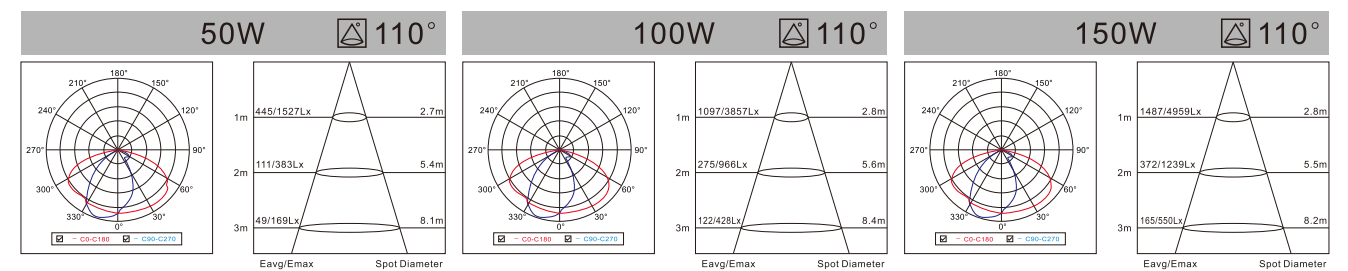

Color Temperature







DSERIES  
LED STREET LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|------------------------------|-----------------------------|
| LPSTL-400D01-Y  | 400W              | 80Ah                                  | 1050×390×88                  | LFP Battery                 |



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|------------------------------|-----------------------------|
| LPSTL-200E01-Y  | 200W              | 6000mAh                               | 360x181x48                   | LFP Battery                 |

Color Temperature



ES SERIES  
LED STREET LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



| Modell<br>Model  | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size | Batterietyp<br>Battery Type |
|------------------|-------------------|---------------------------------------|------------------------------|-----------------------------|
| LPSTL-100ES01-SS | 100W              | 5000mAh                               | 310x207x47mm                 | LFP battery                 |
| LPSTL-200ES01-SS | 200W              | 6000mAh                               | 385x207x47mm                 | LFP battery                 |
| LPSTL-300ES01-SS | 300W              | 10000mAh                              | 460x220x47mm                 | LFP battery                 |
| LPSTL-400ES01-SS | 400W              | 15000mAh                              | 580x236x47mm                 | LFP battery                 |
| LPSTL-500ESO1-SS | 500W              | 24000mAh                              | 658x236x47mm                 | LFP battery                 |

Color Temperature








LED SOLAR LIGHT

CRI≥80 H:20000h


IP65



| Modell<br>Model | Leistung<br>Power | Opladtid<br>Charging Time | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------|---------------------------------------|------------------------------|--------------------------------------------------------|-----------------------------|
| LPSTL-100D01    | 100W              | 4-6 Hours                 | 15Ah                                  | 510X50X320mm                 | Ø 55-60mm                                              | LFP Battery                 |
| LPSTL-200D01    | 200W              | 4-6 Hours                 | 26Ah                                  | 510X50X320mm                 | Ø 55-60mm                                              | LFP Battery                 |

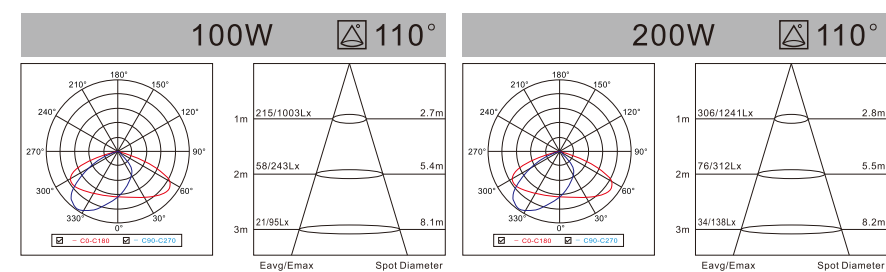

Color Temperature







100W/200W  
**SOLAR** STREET LIGHT IP65

LED SOLAR LIGHT

CRI≥80 H:20000h



| Modell<br>Model  | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter | Batterietyp<br>Battery Type |
|------------------|-------------------|---------------------------------------|------------------------------|--------------------------------------------------------|-----------------------------|
| LPSTL-100BS01-SS | 100W              | 20Ah                                  | 670X350X590mm                | Ø 50/60mm                                              | LFP Battery                 |
| LPSTL-200BS01-SS | 200W              | 30Ah                                  | 770X350X670mm                | Ø 50/60mm                                              | LFP Battery                 |

Color Temperature






**LED SOLAR LIGHT**

CRI≥80 H:20000h

**IP65**

| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size | Rohrdurchmesser einbauen<br>Installation Pipe Diameter | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|------------------------------|--------------------------------------------------------|-----------------------------|
| LPSTL-30BS01-SS | ● 30W             | 6.5Ah                                 | 200X120X430mm                | Ø 55mm                                                 | LFP Battery                 |
| LPSTL-60BS01-SS | ● 60W             | 12Ah                                  | 450X125X450mm                | Ø 55mm                                                 | LFP Battery                 |
| LPSTL-90BS01-SS | ● 90W             | 16.5Ah                                | 510X125X510mm                | Ø 55mm                                                 | LFP Battery                 |

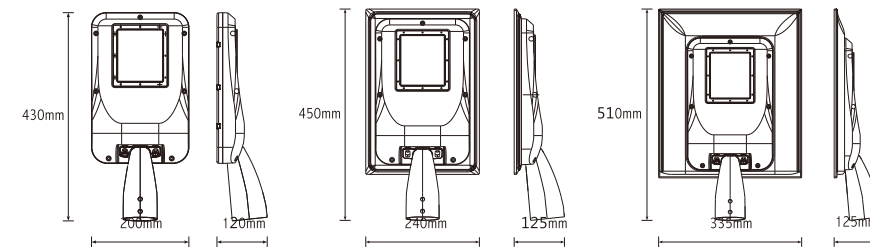**LED WALL LIGHT**

CRI≥80 H:20000h

**Infrared Sensor**

01:black 02:white

| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Produktgröße<br>Product Size |
|-----------------|-------------------|---------------------------------------|------------------------------|
| LPWL-20B01      | ● 20W             | 3.6Ah                                 | 164X118X40mm                 |
| LPWL-40B01      | ● 40W             | 5.4Ah                                 | 224X118X48mm                 |
| LPWL-20B02      | ● 20W             | 3.6Ah                                 | 164X118X40mm                 |
| LPWL-40B02      | ● 40W             | 5.4Ah                                 | 224X118X48mm                 |

Color Temperature

Warm White



Cool White




Natural White







HF SERIES

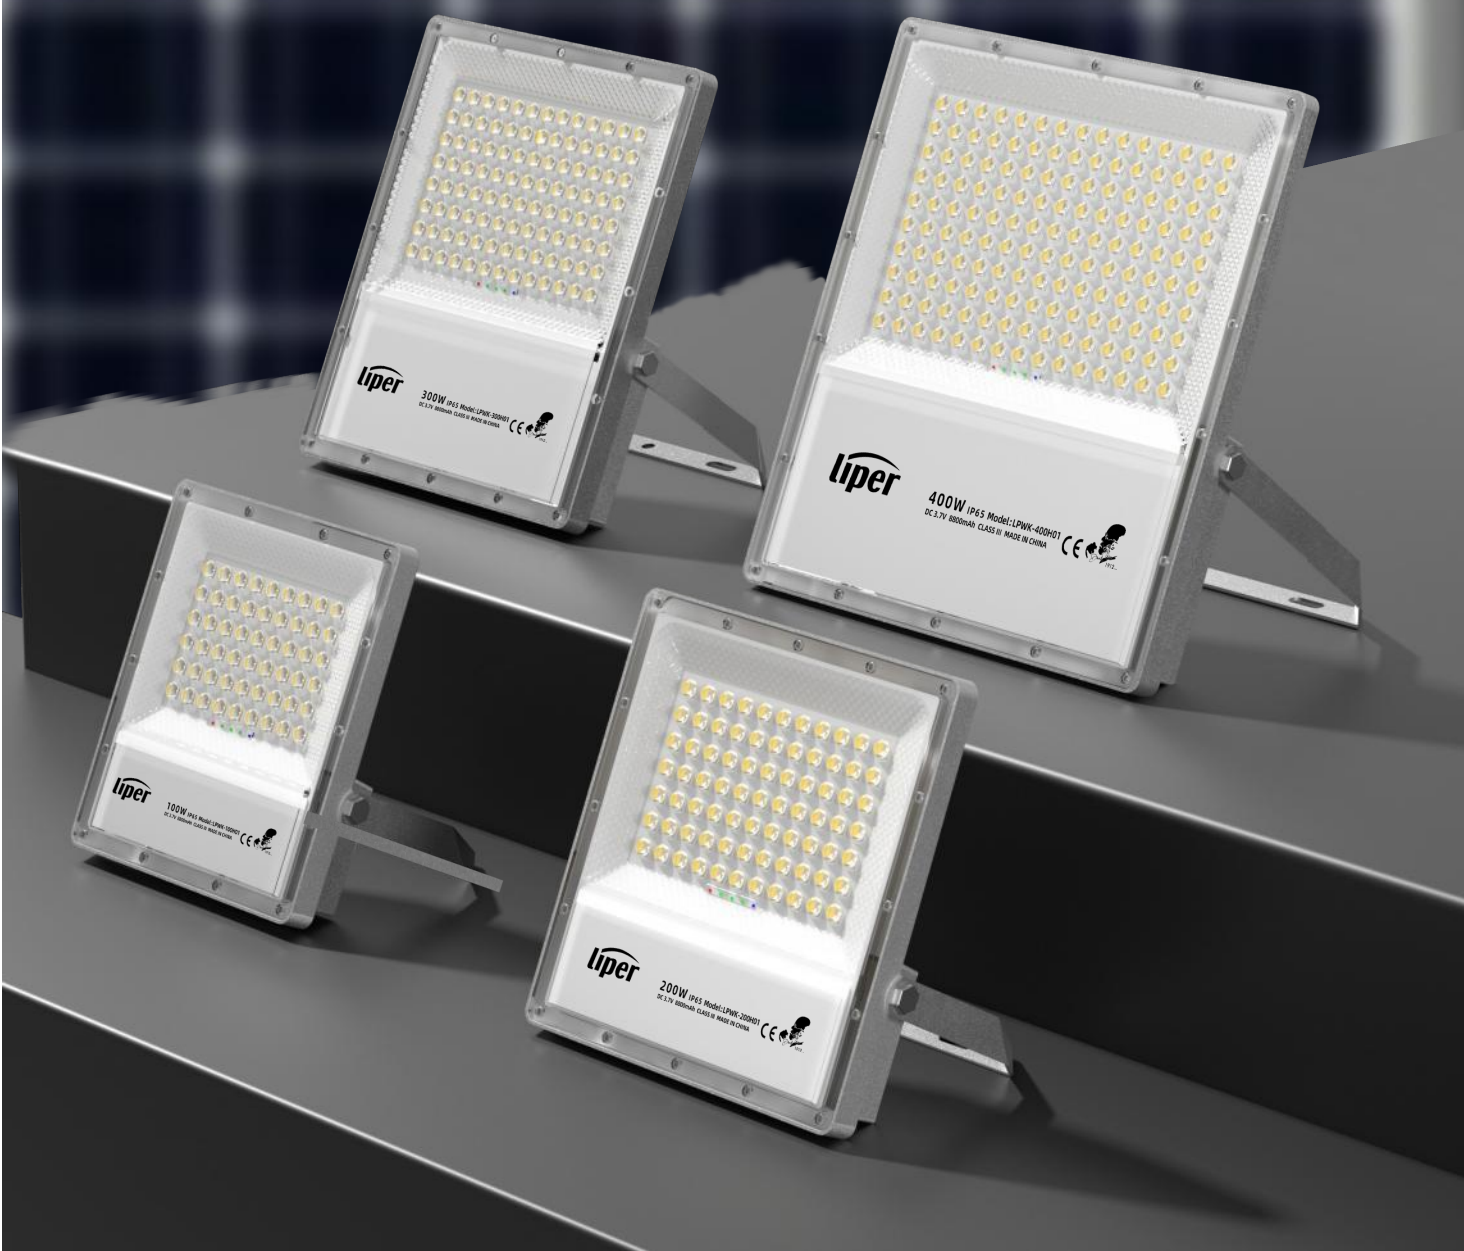

| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPFL-100HF01-SS | 100W              | 6Ah                                   | LFP Battery                 |
| LPFL-200HF01-SS | 200W              | 12Ah                                  | LFP Battery                 |
| LPFL-300HF01-SS | 300W              | 18Ah                                  | LFP Battery                 |
| LPFL-400HF01-SS | 400W              | 24Ah                                  | LFP Battery                 |

Color Temperature



HW SERIES  
LED SOLAR LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPFL-100HW01-SS | 100W              | 5AH                                   | LFP battery                 |
| LPFL-200HW01-SS | 200W              | 10AH                                  | LFP battery                 |
| LPFL-300HW01-SS | 300W              | 15AH                                  | LFP battery                 |
| LPFL-400HW01-SS | 400W              | 20AH                                  | LFP battery                 |



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPFL-100HW02-SS | 100W              | 5AH                                   | LFP battery                 |
| LPFL-200HW02-SS | 200W              | 10AH                                  | LFP battery                 |
| LPFL-300HW02-SS | 300W              | 15AH                                  | LFP battery                 |
| LPFL-400HW02-SS | 400W              | 20AH                                  | LFP battery                 |

Color Temperature







D/MT SERIES  
LED SOLAR LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPWL-100D01     | 100W              | 3.2V 4.4Ah                            | LFP battery                 |

MT SERIES  
LED SOLAR LIGHT



YS: white YSB: black

| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPDL-30MT01-YS  | 30W               | 3.2V 5.4Ah                            | LFP Battery                 |
| LPDL-30MT01-YSB | 30W               | 3.2V 5.4Ah                            | LFP Battery                 |

Color Temperature





C SERIES  
LED SOLAR LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPWL-100C01     | 100W              | 3.2V 2.2Ah                            | LFP Battery                 |
| LPWL-200C01     | 200W              | 3.2V 4.4Ah                            | LFP Battery                 |

Infrared Sensor



| Modell<br>Model | Leistung<br>Power | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|-------------------|---------------------------------------|-----------------------------|
| LPFL-100C01-G   | 100W              | 3.7V 2.2Ah                            | LFP Battery                 |
| LPFL-200C01-G   | 200W              | 3.7V 2.2Ah                            | LFP Battery                 |

Color Temperature







## Multi-functional solar system

**30W/40W**



20h    15h    9h    6h



## LED SOLAR LIGHT

CRI $\geq$ 80 H:20000h



01:black 02:white

| Modell<br>Model | Leistung<br>Power                                                                                | Batteriekapazität<br>Battery Capacity | Batterietyp<br>Battery Type |
|-----------------|--------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------|
| LP-MS30A01      |  <b>30W</b>   | 6Ah                                   | LFP Battery                 |
| LP-MS40A01      |  <b>40W</b>  | 12Ah                                  | LFP Battery                 |
| LP-MS30A02      |  <b>30W</b> | 6Ah                                   | LFP Battery                 |
| LP-MS40A02      |  <b>40W</b> | 12Ah                                  | LFP Battery                 |



### Color Temperature

Warm White

Cool White

Natural White


Liper **Light** 033/034





## FRESH LIGHT FOR SUPERMARKET

Ra>90(AVERAGE OF R1-R8)  
R9>0(OBJECT MORE COLORFUL)

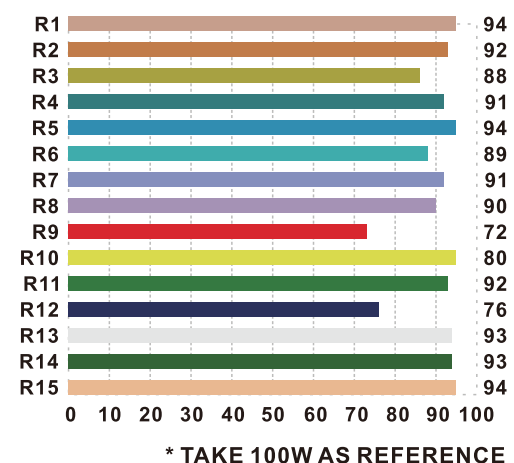



BS SERIES  
LED UFO LIGHT

1912...  
GERMANY LIPER


NEW

150W / 200W / 300W

IP65

LPWL-100D01

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPUF-150BS01    | 150W              | 16500-20250LM  | N                  | Ø 385X120mm                  |
| LPUF-200BS01    | 200W              | 22000-27000LM  | N                  | Ø 385X120mm                  |
| LPUF-300BS01    | 300W              | 33000-40500LM  | N                  | Ø 385X120mm                  |

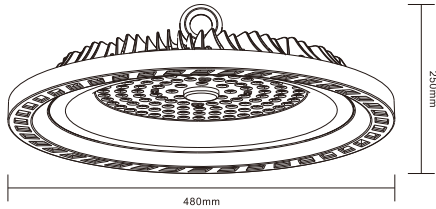

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

E/CS SERIES  
LED UFO LIGHT

LED UFO LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPUF-100E01     | 100W              | 10500-11550LM  | N                  | Ø 263X63mm                   |
| LPUF-150E01     | 150W              | 14900-16390LM  | N                  | Ø 315X69mm                   |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPUF-75CS01     | 75W               | 7500-8250LM    | N                  | Ø 256X32mm                   |
| LPUF-100CS01    | 100W              | 10000-11000LM  | N                  | Ø 296X32mm                   |
| LPUF-150CS01    | 150W              | 15000-16500LM  | N                  | Ø 365X32mm                   |

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White









AS SERIES  
LED LAMP

LED LAMP


AC:100/220-240V CRI≥80 H:30000h




| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lampensockel<br>Base |
|-----------------|-------------------|----------------|--------------------|------------------------------|----------------------|
| LPUF-20AS-02    | 20W               | 1750-1850LM    | N                  | Ø 130X70mm                   | E27/B22              |
| LPUF-40AS-02    | 40W               | 3750-3850LM    | N                  | Ø 190X103mm                  | E27/B22              |
| LPUF-60AS-02    | 60W               | 5750-5850LM    | N                  | Ø 255X130mm                  | E27/B22              |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lampensockel<br>Base |
|-----------------|-------------------|----------------|--------------------|------------------------------|----------------------|
| LPUF-20AS-01    | 20W               | 1750-1850LM    | N                  | Ø 130X70mm                   | E27/B22              |
| LPUF-40AS-01    | 40W               | 3750-3850LM    | N                  | Ø 190X103mm                  | E27/B22              |
| LPUF-60AS-01    | 60W               | 5750-5850LM    | N                  | Ø 255X130mm                  | E27/B22              |

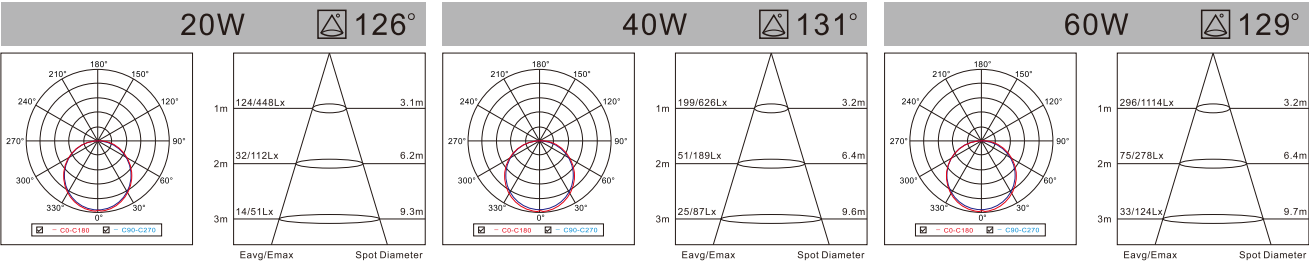

Color Temperature

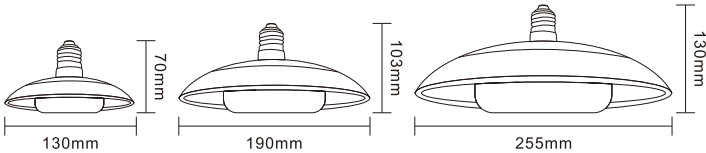

D/ES SERIES  
LED LAMP

LED LAMP

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lampensockel<br>Base |
|-----------------|-------------------|----------------|--------------------|------------------------------|----------------------|
| LPQP5DLED-01    | 5W                | 430-470LM      | N                  | Ø 60X106mm                   | E27/B22              |
| LPQP7DLED-01    | 7W                | 600-660LM      | N                  | Ø 60X106mm                   | E27/B22              |
| LPQP9DLED-01    | 9W                | 770-860LM      | N                  | Ø 60X108mm                   | E27/B22              |
| LPQP12DLED-01   | 12W               | 1005-1105LM    | N                  | Ø 60X110mm                   | E27/B22              |
| LPQP15DLED-01   | 15W               | 1235-1365LM    | N                  | Ø 70X124mm                   | E27/B22              |
| LPQP18DLED-01   | 18W               | 1520-1680LM    | N                  | Ø 80X145mm                   | E27/B22              |
| LPQP20DLED-01   | 20W               | 1710-1890LM    | N                  | Ø 80X145mm                   | E27/B22              |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lampensockel<br>Base |
|-----------------|-------------------|----------------|--------------------|------------------------------|----------------------|
| LPQP20ES-01     | 20W               | 1900-2100LM    | N                  | Ø 80X150mm                   | E27/B22              |
| LPQP30ES-01     | 30W               | 2850-3150LM    | N                  | Ø 100X185mm                  | E27/B22              |
| LPQP40ES-01     | 40W               | 3610-3990LM    | N                  | Ø 120X210mm                  | E27/B22              |
| LPQP50ES-01     | 50W               | 4275-4725LM    | N                  | Ø 138X240mm                  | E27/B22              |

Color Temperature







A SERIES  
LED STEP LIGHT

LED STEP LIGHT


AC:100/220-240V CRI≥80 H:30000h

IP65



01:black 02:white 03:grey

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPWL-07A01-Y    | 7W                | 595-640LM      | N                  | Ø 228x81x30mm                |
| LPWL-07A01YCCT  | 7W                | 595-640LM      | N                  | Ø 228x81x30mm                |

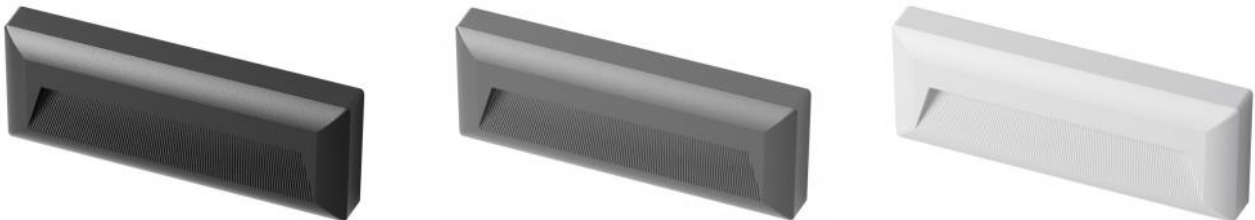

01:black 02:white 03:grey

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPWL-05A01-Y    | 5W                | 425-510LM      | N                  | 228x85x30mm                  |
| LPWL-05A01YCCT  | 5W                | 425-510LM      | N                  | 228x85x30mm                  |

Color Temperature



AS SERIES  
LED STEP LIGHT

LED STEP LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP65




01:black 02:white 03:grey

| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------|-------------------|----------------|--------------------|------------------------------|
| LPWL-05AS01-Y    | 5W                | 315-385LM      | N                  | Ø 246X97X45mm                |
| LPWL-05AS01-YCCT | 5W                | 315-385LM      | N                  | Ø 246X97X45mm                |
| LPWL-07AS01-Y    | 7W                | 520-640LM      | N                  | Ø 246X97X45mm                |
| LPWL-07AS01-YCCT | 7W                | 520-640LM      | N                  | Ø 246X97X45mm                |





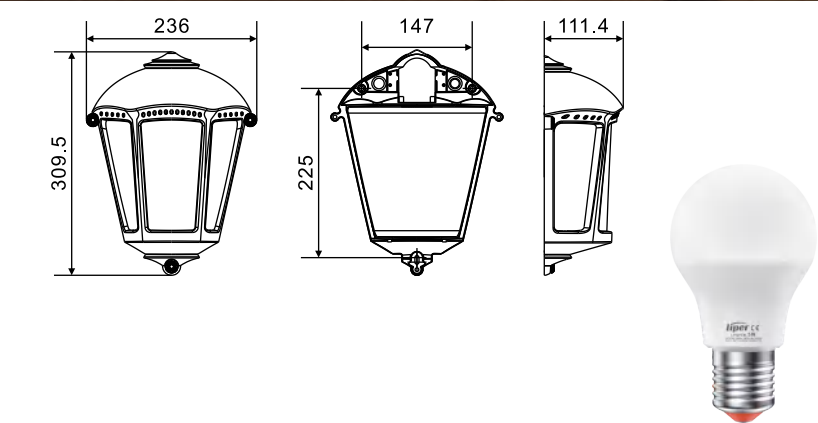



D SERIES


LED WALL LIGHT

LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPWL-04D01-Y    | 4W                | 190-230LM      | N                  | 142X95X51mm                  |
| LPWL-06D01-Y    | 6W                | 380-460LM      | N                  | 182X103X51mm                 |
| LPWL-08D01-Y    | 8W                | 510-610LM      | N                  | 218X111X59mm                 |








C SERIES  
LED WALL LIGHT

LED WALL LIGHT


AC:100/220-240V CRI≥80 H:30000h

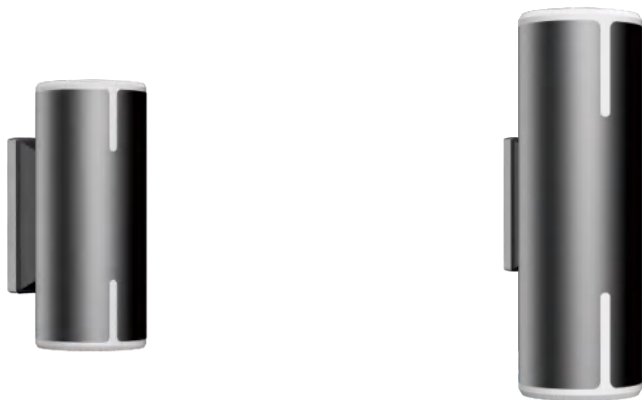

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | DIM<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|------------|------------------------------|
| LPWL-08C01-Y    | 8W                | 440-480LM      | N          | Ø 70X165mm                   |
| LPWL-12C01-Y    | 12W               | 660-720LM      | N          | Ø 90X275mm                   |



Color Temperature

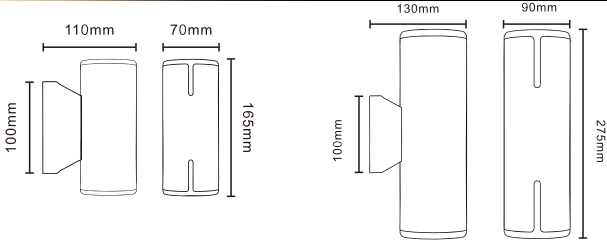



C SERIES  
LED WALL LIGHT


LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h




| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | DIM<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|------------|------------------------------|
| LPWL-10C01-Y    | 10W               | 550-600LM      | N          | Ø80X230mm                    |

Color Temperature





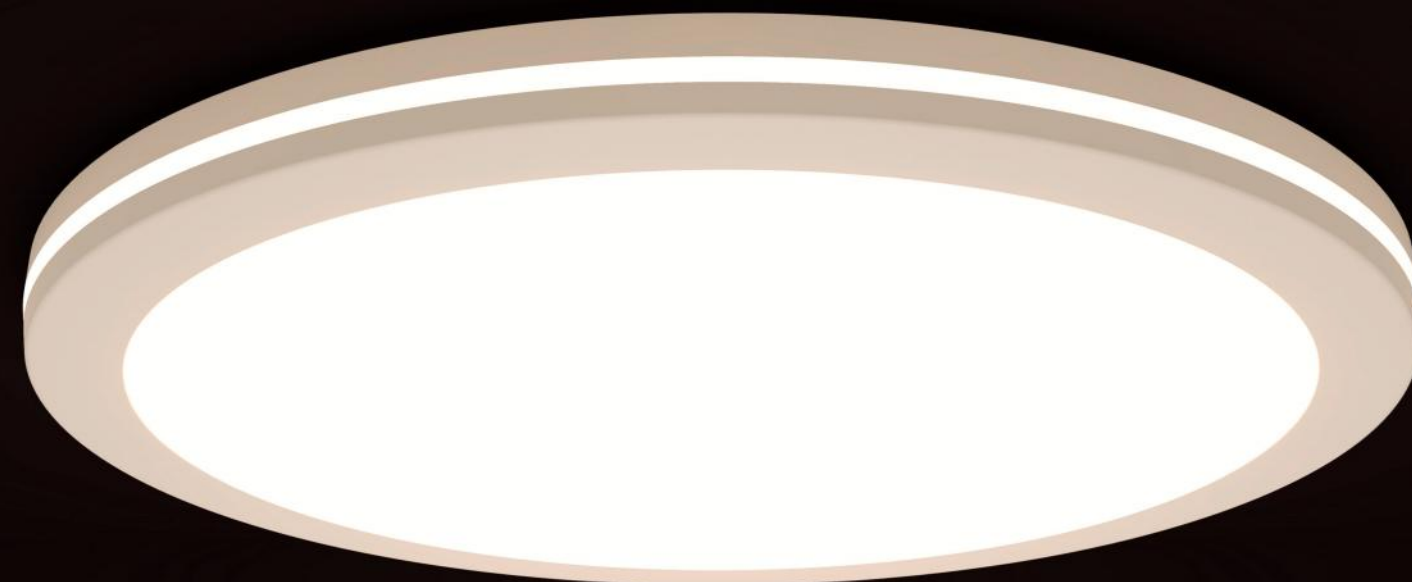





MA SERIES  
LED DOWNLIGHT




1912...  
GERMANY LIPER





IP65 Anti-insect

Liper APP



Remote Control



Motion Sensor





IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model        | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL20MA01-Y          | 20W               | 1600-1700LM    | N                  | Ø 182X48mm                   |
| LP-DL30MA01-Y          | 30W               | 2400-2500LM    | N                  | Ø 235X52mm                   |
| LP-DL40MA01-Y          | 40W               | 3200-3300LM    | N                  | Ø 292X55mm                   |
| LP-DL50MA01-Y          | 50W               | 5000-5100LM    | N                  | Ø 380X55mm                   |
| LP-DL60MA01-Y          | 60W               | 5130-5670LM    | N                  | Ø 495X53mm                   |
| LP-DL20MA01-YG(SENSOR) | 20W               | 1600-1700LM    | N                  | Ø 182X48mm                   |
| LP-DL30MA01-YG(SENSOR) | 30W               | 2400-2500LM    | N                  | Ø 235X52mm                   |

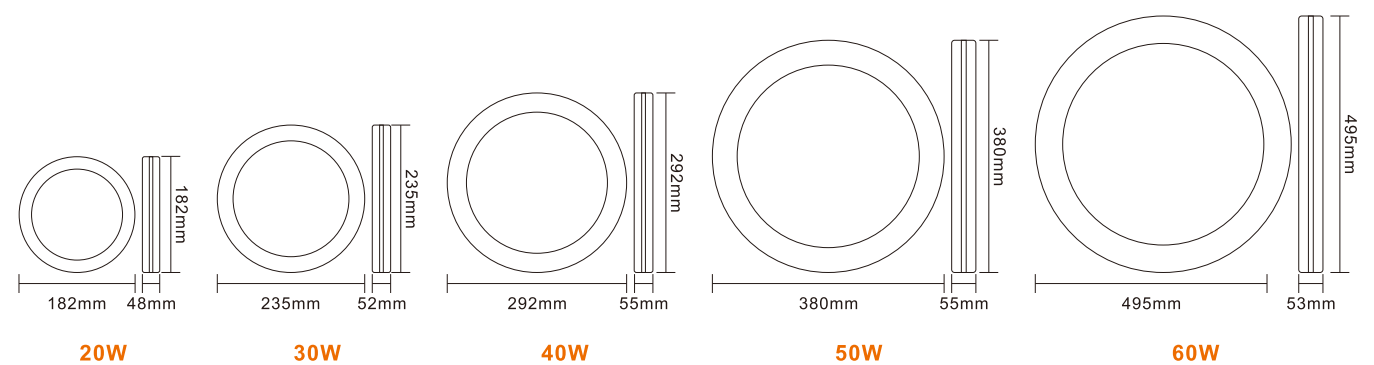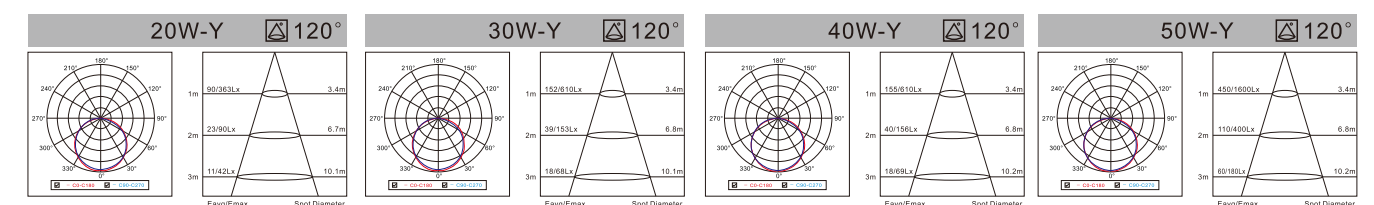

Color Temperature

Warm White



Cool White




Natural White



CCT Adjustable






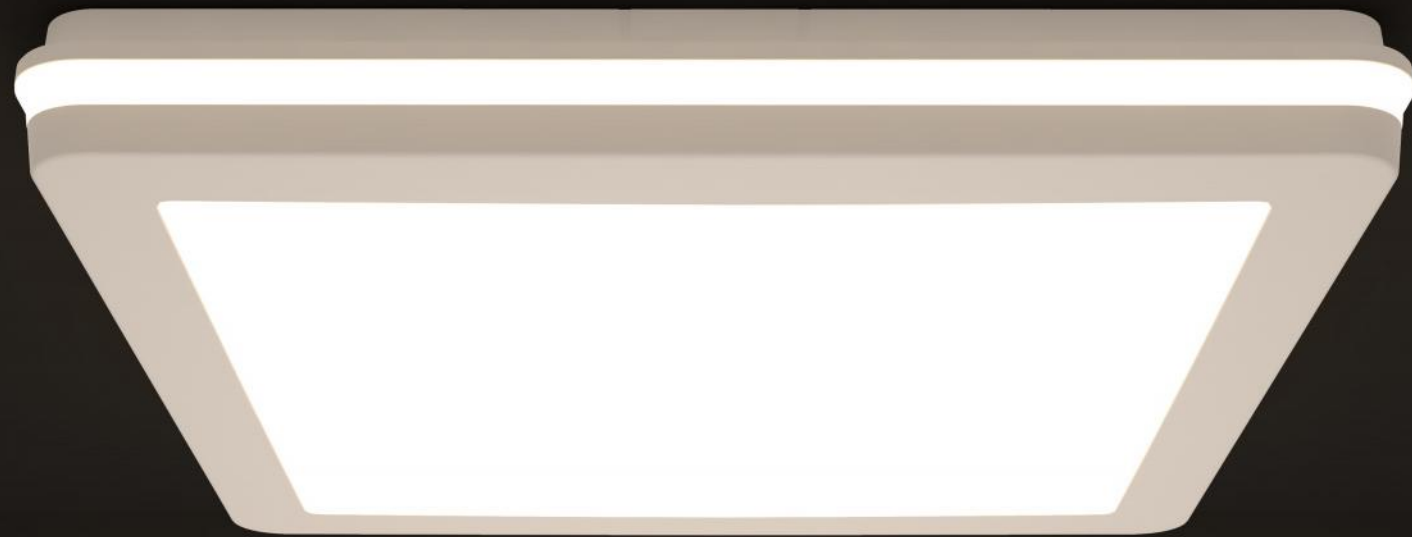


IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model        | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL30MA01-F          | 30W               | 2400-2500LM    | N                  | 215X57X215mm                 |
| LP-DL40MA01-F          | 40W               | 3200-3300LM    | N                  | 265X55X265mm                 |
| LP-DL30MA01-FG(SENSOR) | 30W               | 2400-2500LM    | N                  | 215X48X215mm                 |
| LP-DL40MA01-FG(SENSOR) | 40W               | 3200-3300LM    | N                  | 265X55X265mm                 |

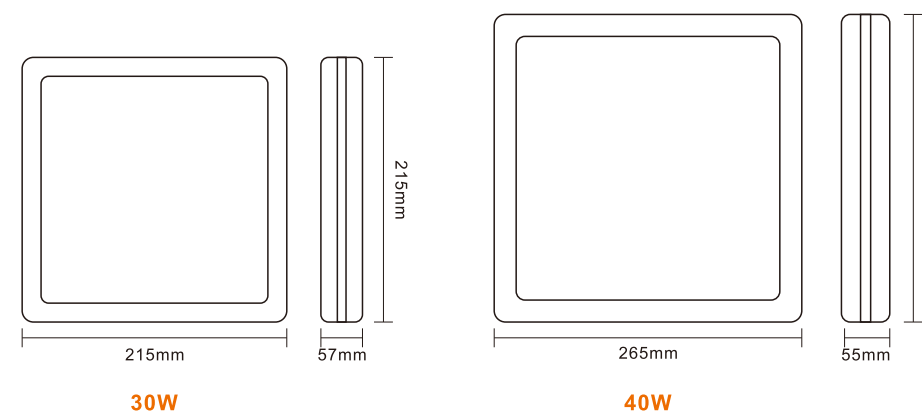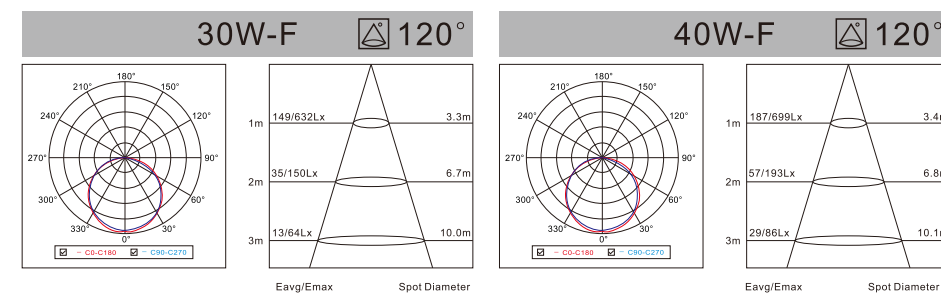

Color Temperature



IP65 Anti-insect



MT SERIES  
LED DOWN LIGHT

20W / 30W IP65

Diamond Downlight

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h





T/Y: white TH/YH: black

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL20MT01-T   | 20W               | 1800-1900LM    | N                  | 255X125X72mm                 |
| LP-DL20MT01-Y   | 20W               | 1800-1900LM    | N                  | Ø 206X72mm                   |
| LP-DL30MT01-Y   | 30W               | 2700-2800LM    | N                  | Ø 256X76mm                   |
| LP-DL20MT01-TH  | 20W               | 1800-1900LM    | N                  | 255X125X72mm                 |
| LP-DL20MT01-YH  | 20W               | 1800-1900LM    | N                  | Ø 206X72mm                   |
| LP-DL30MT01-YH  | 30W               | 2700-2800LM    | N                  | Ø 256X76mm                   |




T/Y: white TH/YH: black

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL20MT02-T   | 20W               | 1800-1900LM    | N                  | 255X125X72mm                 |
| LP-DL20MT02-Y   | 20W               | 1800-1900LM    | N                  | Ø 206X72mm                   |
| LP-DL30MT02-Y   | 30W               | 2700-2800LM    | N                  | Ø 256X76mm                   |
| LP-DL20MT02-TH  | 20W               | 1800-1900LM    | N                  | 255X125X72mm                 |
| LP-DL20MT02-YH  | 20W               | 1800-1900LM    | N                  | Ø 206X72mm                   |
| LP-DL30MT02-YH  | 30W               | 2700-2800LM    | N                  | Ø 256X76mm                   |

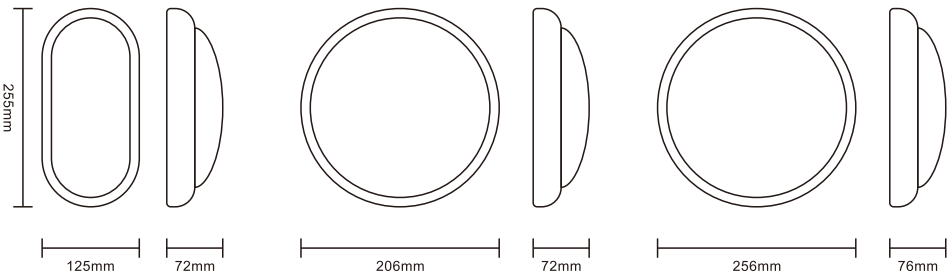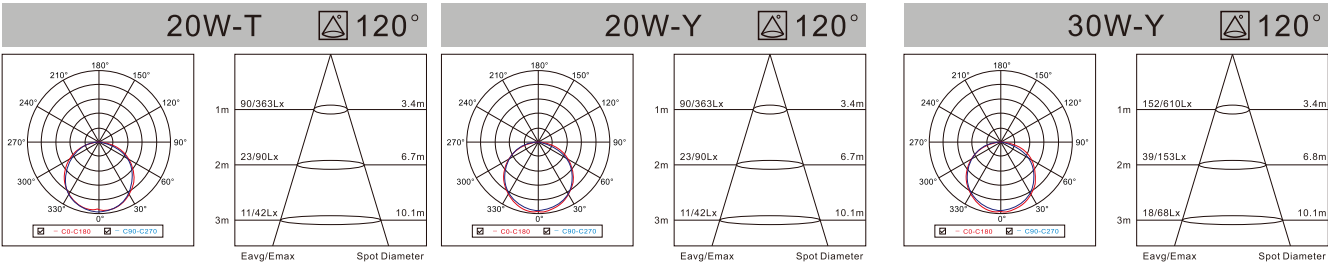

Color Temperature







MT SERIES  
LED DOWN LIGHT





**WITH SENSOR**

Advised installation height : 3-5m

Max detection distance : 10m

It will turn off after people leave induction zone for 90s


IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



F: white FH: black

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL30MT02-F   | ● 30W             | 2755-3045LM    | N                  | 205X60X205mm                 |
| LP-DL40MT02-F   | ● 40W             | 3610-3990LM    | N                  | 260X60X260mm                 |
| LP-DL30MT02-FH  | ● 30W             | 2755-3045LM    | N                  | 205X60X205mm                 |
| LP-DL40MT02-FH  | ● 40W             | 3610-3990LM    | N                  | 260X60X260mm                 |

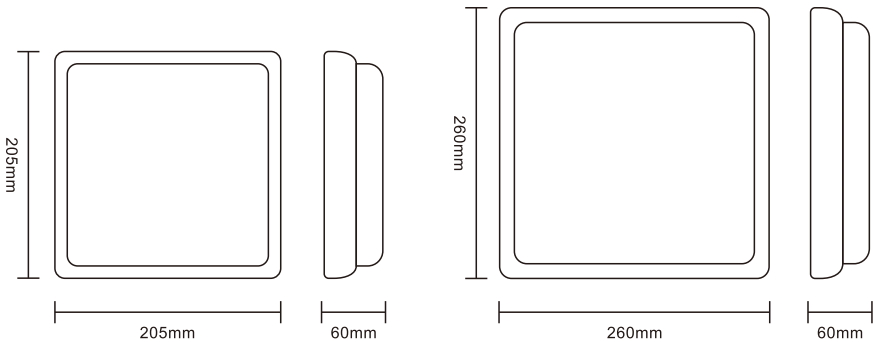

Color Temperature







 MF SERIES  
LED DOWN LIGHT



IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



T : white TB : black


| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL20MF01-T   | ● 20W             | 1710-1890LM    | N                  | 224X56X138                   |
| LP-DL30MF01-Y   | ● 30W             | 2570-2840LM    | N                  | 255X55X255                   |
| LP-DL20MF01-TB  | ● 20W             | 1710-1890LM    | N                  | 224X56X138                   |
| LP-DL30MF01-YB  | ● 30W             | 2570-2840LM    | N                  | 255X55X255                   |

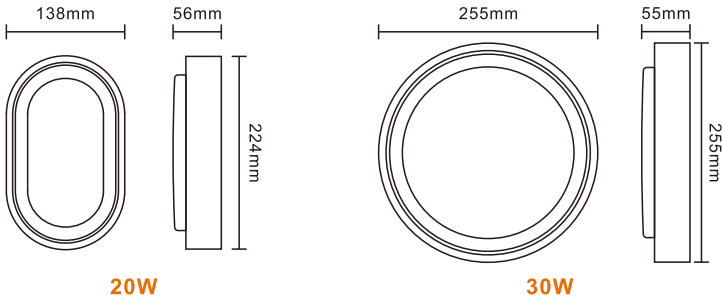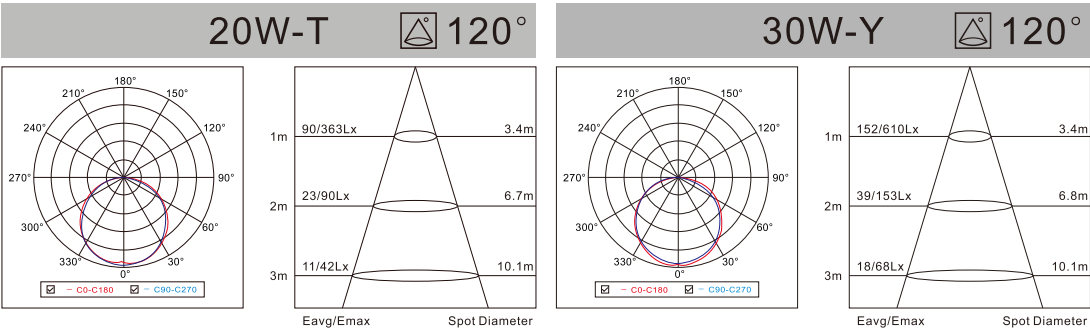

Material

High Quality Aviation  
Aluminum

Color Temperature







GERMANY LIPER

MS SERIES  
LED DOWN LIGHT

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP65



| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------|-------------------|----------------|--------------------|------------------------------|
| LPDL-25MS01-Y    | 25W               | 2125-2250LM    | N                  | Ø 215X65mm                   |
| LPDL-35MS01-Y    | 35W               | 2975-3150LM    | N                  | Ø 282X77mm                   |
| LPDL-45MS01-Y    | 45W               | 3825-4050LM    | N                  | Ø 330X86mm                   |
| LPDL-25MS01-YCCT | 25W               | 2125-2250LM    | N                  | Ø 215X65mm                   |
| LPDL-35MS01-YCCT | 35W               | 2975-3150LM    | N                  | Ø 282X77mm                   |
| LPDL-45MS01-YCCT | 45W               | 3825-4050LM    | N                  | Ø 330X86mm                   |



Color Temperature







MF SERIES  
LED WALL LIGHT


IP65




Radar Sensor  
Lux: <25lux  
Sensing Distance: 5-8meter  
Time-Delay: 90s

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

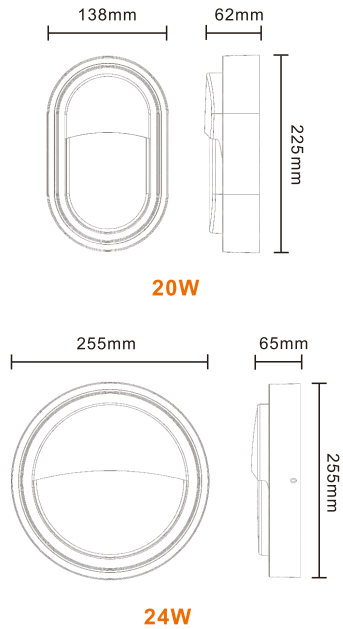

| Modell<br>Model           | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|---------------------------|-------------------|----------------|--------------------|------------------------------|
| LP-DL20MF01-TB-C          | 20W               | 1800LM         | N                  | 225X138X62                   |
| LP-DL20MF01-TB-CG(SENSOR) | 20W               | 1800LM         | N                  | 225X138X62                   |
| LP-DL24MF01-YB-C          | 24W               | 2160LM         | N                  | 255X65X255                   |
| LP-DL24MF01-YB-CG(SENSOR) | 24W               | 2160LM         | N                  | 255X65X255                   |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPDL-15MF01-F-C | 15W               | 1275-1315LM    | N                  | 198X160X46mm                 |

Material

High Quality Aviation  
Aluminum

Color Temperature







MW SERIES  
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥90 H:30000h

IP44



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPDL-40MW01-Y   | 40W               | 3600LM         | N                  | Ø400X20mm                    |
| LPDL-50MW01-Y   | 50W               | 4500LM         | N                  | Ø500X20mm                    |
| LPDL-60MW01-Y   | 60W               | 5400LM         | N                  | Ø600X20mm                    |



ALL IN ONE



2700K 4000K 6500K

Color Temperature

Warm White



Cool White





Natural White



CCT Adjustable



40W/50W/60W



Eavg/Emax Spot Diameter




EMS SERIES  
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

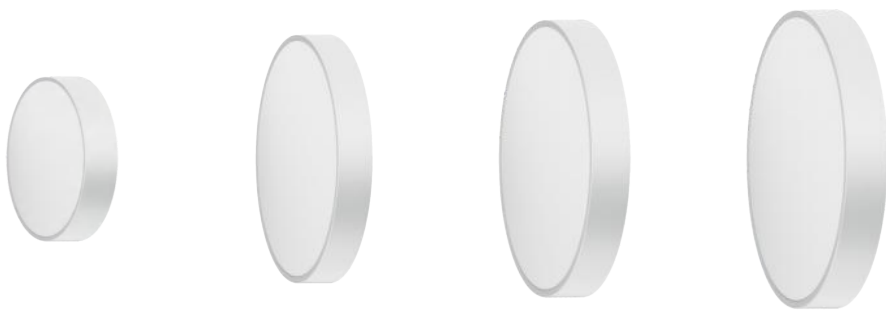

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPDL-06EMS01-Y  | 6W                | 378-462LM      | N                  | Ø 110x39mm                   |
| LPDL-12EMS01-Y  | 12W               | 864-1056LM     | N                  | Ø 172x39mm                   |
| LPDL-18EMS01-Y  | 18W               | 1296-1584LM    | N                  | Ø 222x39mm                   |
| LPDL-24EMS01-Y  | 24W               | 1836-2244LM    | N                  | Ø 280x39mm                   |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPDL-12EMS01-F  | 12W               | 864-1056LM     | N                  | 172x37.5mm                   |
| LPDL-18EMS01-F  | 18W               | 1296-1584LM    | N                  | 203x37.5mm                   |
| LPDL-24EMS01-F  | 24W               | 1836-2244LM    | N                  | 256x37.5mm                   |

Color Temperature

Warm White



Cool White



Natural White








A SERIES  
LED DOWNLIGHT

LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

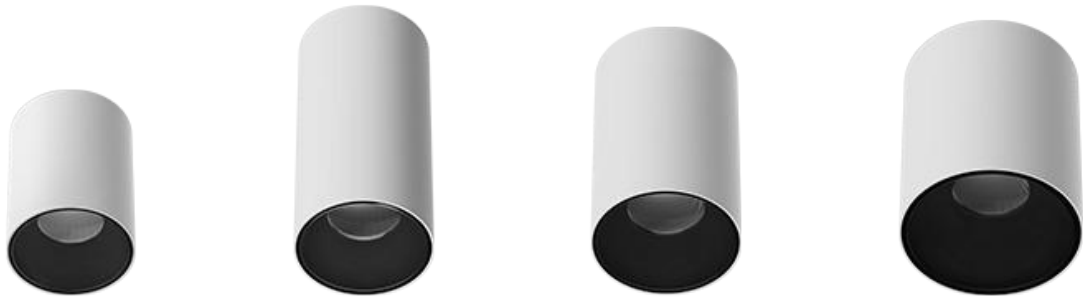

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPCL-10A01-Y    | 10W               | 850-935LM      | N                  | Ø75X100mm                    |
| LPCL-15A01-Y    | 15W               | 1275-1360LM    | N                  | Ø75X150mm                    |
| LPCL-20A01-Y    | 20W               | 1700-1785LM    | N                  | Ø95X150mm                    |
| LPCL-30A01-Y    | 30W               | 2550-2635LM    | N                  | Ø115X135mm                   |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPCL-10A01-YB   | 10W               | 850-935LM      | N                  | Ø75X100mm                    |
| LPCL-15A01-YB   | 15W               | 1275-1360LM    | N                  | Ø75X150mm                    |
| LPCL-20A01-YB   | 20W               | 1700-1785LM    | N                  | Ø95X150mm                    |
| LPCL-30A01-YB   | 30W               | 2550-2635LM    | N                  | Ø115X135mm                   |

Color Temperature



A SERIES  
LED DOWNLIGHT

LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Y:white YB:black

| Modell<br>Model   | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-------------------|-------------------|----------------|--------------------|------------------------------|
| LPCL-15A01-YR     | 15W               | 1275-1360LM    | N                  | Ø85X88mm                     |
| LPCL-15A01-YRCCT  | 15W               | 1275-1360LM    | N                  | Ø85X88mm                     |
| LPCL-15A01-YBR    | 15W               | 1275-1360LM    | N                  | Ø85X88mm                     |
| LPCL-15A01-YBRCCT | 15W               | 1275-1360LM    | N                  | Ø85X88mm                     |







IP44



Material

High Quality Aviation  
Aluminum

Color Temperature

Warm White





Cool White



Natural White




CCT Adjustable

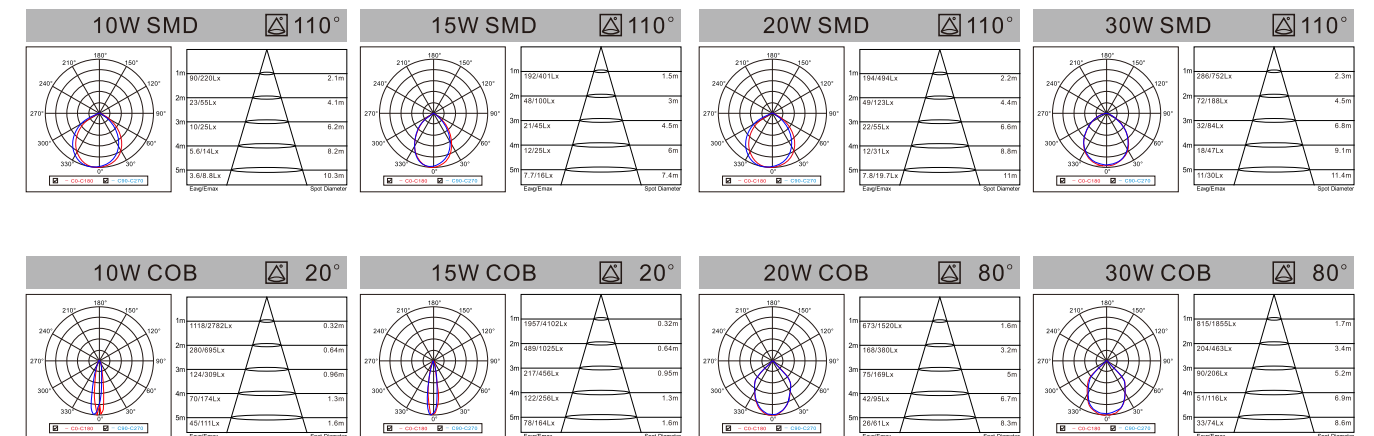

85mm

10W



108mm

15W



160mm

20W



208mm

30W





G SERIES  
LED DOWN LIGHT


LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

COB



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL10G01-Y    | 10W               | 780-840LM      | N                  | Ø 85X53mm                    | Ø 75-80mm           |
| LP-DL15G01-Y    | 15W               | 1150-1250LM    | N                  | Ø 108X55mm                   | Ø 95-100mm          |
| LP-DL20G01-Y    | 20W               | 1550-1650LM    | N                  | Ø 165X85mm                   | Ø 145-150mm         |
| LP-DL30G01-Y    | 30W               | 2300-2400LM    | N                  | Ø 215X104mm                  | Ø 190-200mm         |

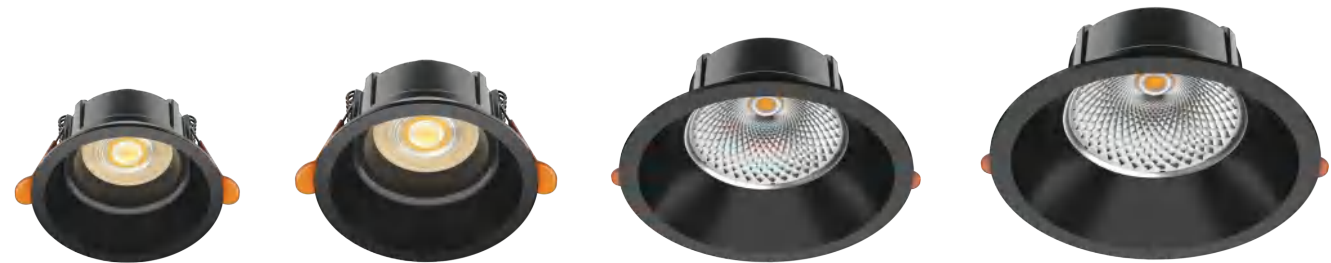

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL10G01-YB   | 10W               | 780-840LM      | N                  | Ø 85X53mm                    | Ø 75-80mm           |
| LP-DL15G01-YB   | 15W               | 1150-1250LM    | N                  | Ø 108X55mm                   | Ø 95-100mm          |
| LP-DL20G01-YB   | 20W               | 1550-1650LM    | N                  | Ø 165X85mm                   | Ø 145-150mm         |
| LP-DL30G01-YB   | 30W               | 2300-2400LM    | N                  | Ø 215X104mm                  | Ø 190-200mm         |

Color Temperature



G SERIES  
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

SMD




| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL10G02-Y    | 10W               | 780-840LM      | N                  | Ø 85X53mm                    | Ø 75-80mm           |
| LP-DL15G02-Y    | 15W               | 1150-1250LM    | N                  | Ø 108X55mm                   | Ø 95-100mm          |
| LP-DL20G02-Y    | 20W               | 1550-1650LM    | N                  | Ø 165X85mm                   | Ø 145-150mm         |
| LP-DL30G02-Y    | 30W               | 2300-2400LM    | N                  | Ø 215X104mm                  | Ø 190-200mm         |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL10G02-YB   | 10W               | 780-840LM      | N                  | Ø 85X53mm                    | Ø 75-80mm           |
| LP-DL15G02-YB   | 15W               | 1150-1250LM    | N                  | Ø 108X55mm                   | Ø 95-100mm          |
| LP-DL20G02-YB   | 20W               | 1550-1650LM    | N                  | Ø 165X85mm                   | Ø 145-150mm         |
| LP-DL30G02-YB   | 30W               | 2300-2400LM    | N                  | Ø 215X104mm                  | Ø 190-200mm         |

Color Temperature







GS/GT SERIES  
LED DOWNLIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Y:white YB:black

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPDL-10GS01-Y   | 10W               | 850-935LM      | N                  | Ø85X53mm                     | Ø75-80mm            |
| LPDL-15GS01-Y   | 15W               | 1275-1360LM    | N                  | Ø108X55mm                    | Ø95-100mm           |
| LPDL-10GS01-YB  | 10W               | 850-935LM      | N                  | Ø85X53mm                     | Ø75-80mm            |
| LPDL-15GS01-YB  | 15W               | 1275-1360LM    | N                  | Ø108X55mm                    | Ø95-100mm           |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPDL-7GT01-Y    | 7W                | 560-595LM      | N                  | Ø 90X46mm                    | Ø75-80mm            |
| LPDL-10GT01-Y   | 10W               | 800-850LM      | N                  | Ø 112X52mm                   | Ø95-100mm           |

Color Temperature




H SERIES  
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

Pre-Embedded

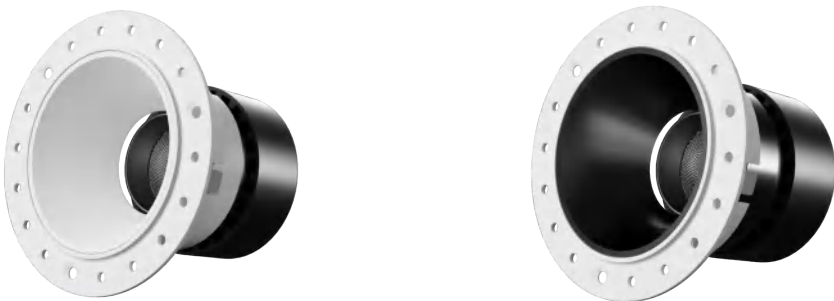

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPCL-10H02-Y    | 10W               | 850-935LM      | N                  | Ø98X88mm                     | Ø75-80mm            |
| LPCL-10H02-YB   | 10W               | 850-935LM      | N                  | Ø98X88mm                     | Ø75-80mm            |



Y:white YB:black

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPCL-10H01-Y    | 10W               | 850-935LM      | N                  | Ø88X80mm                     | Ø75-80mm            |
| LPCL-10H01-YB   | 10W               | 850-935LM      | N                  | Ø88X80mm                     | Ø75-80mm            |

Color Temperature






 **K SERIES**  
**LED DOWNLIGHT**



IP44

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPDL-06K01-Y    | ● <b>6W</b>       | 600LM          | N                  | Ø 95X28mm                    | ⌀ Ø 50-90mm         |
| LPDL-12K01-Y    | ● <b>12W</b>      | 1200LM         | N                  | Ø 129X28mm                   | ⌀ Ø 75-110mm        |
| LPDL-18K01-Y    | ● <b>18W</b>      | 1800LM         | N                  | Ø 170X28mm                   | ⌀ Ø 100-150mm       |
| LPDL-24K01-Y    | ● <b>24W</b>      | 2400LM         | N                  | Ø 228X28mm                   | ⌀ Ø 150-210mm       |

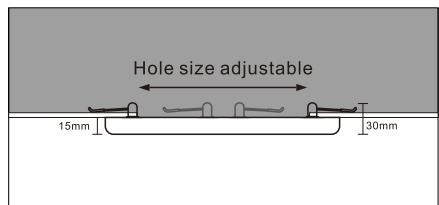

Color Temperature



 **EN/EC SERIES**  
**LED DOWNLIGHT**

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL10EN01-Y   | ● <b>10W</b>      | 1000-1050LM    | N                  | Ø 90x30mm                    | ⌀ Ø 50-85mm         |
| LP-DL18EN01-Y   | ● <b>18W</b>      | 1800-1950LM    | N                  | Ø 115x30mm                   | ⌀ Ø 60-105mm        |
| LP-DL24EN01-Y   | ● <b>24W</b>      | 2400-2550LM    | N                  | Ø 160x30mm                   | ⌀ Ø 75-150mm        |
| LP-DL36EN01-Y   | ● <b>36W</b>      | 3600-3750LM    | N                  | Ø 215x31mm                   | ⌀ Ø 90-200mm        |

IP44



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL03EC01-Y   | ● <b>3W</b>       | 210-240LM      | N                  | Ø 85x25mm                    | ⌀ Ø 40-75mm         |
| LP-DL06EC01-Y   | ● <b>6W</b>       | 430-510LM      | N                  | Ø 116x25mm                   | ⌀ Ø 55-105mm        |
| LP-DL12EC01-Y   | ● <b>12W</b>      | 880-1020LM     | N                  | Ø 166x25mm                   | ⌀ Ø 55-155mm        |
| LP-DL18EC01-Y   | ● <b>18W</b>      | 1450-1530LM    | N                  | Ø 219x25mm                   | ⌀ Ø 55-210mm        |


Color Temperature








EW SERIES  
LED DOWN LIGHT

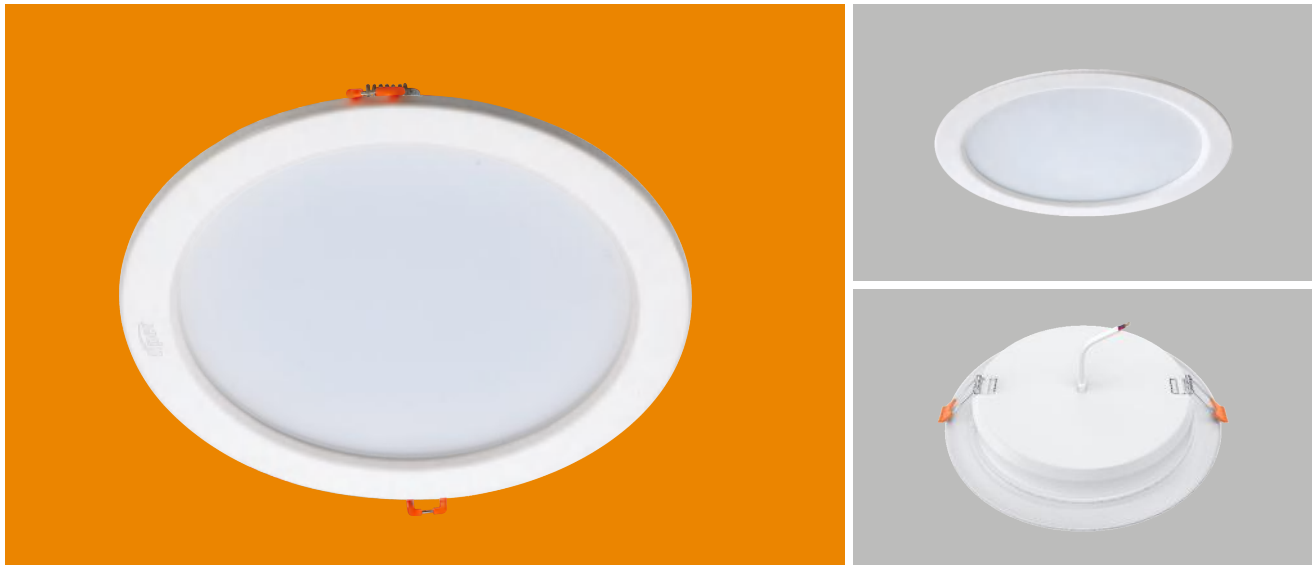

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

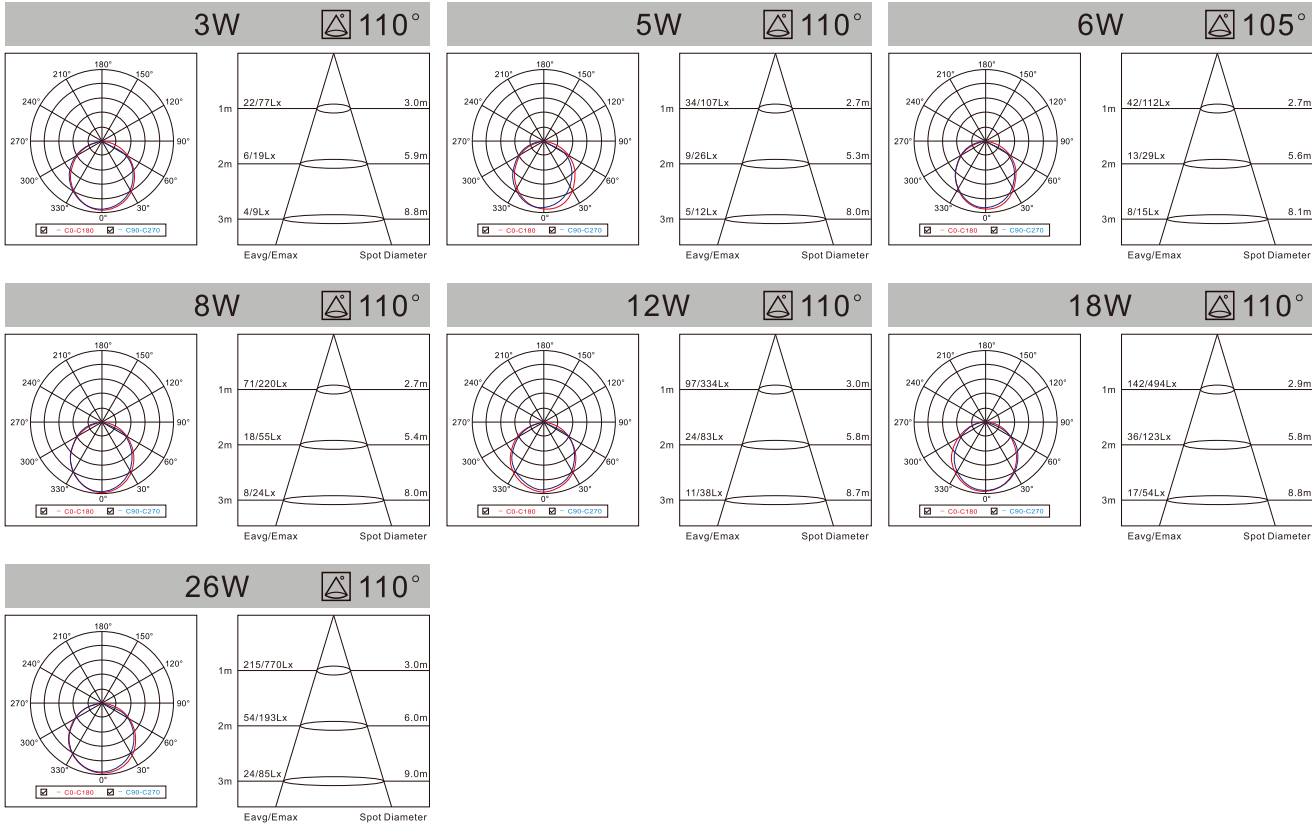


Color Temperature





BX SERIES

LED DOWN LIGHT

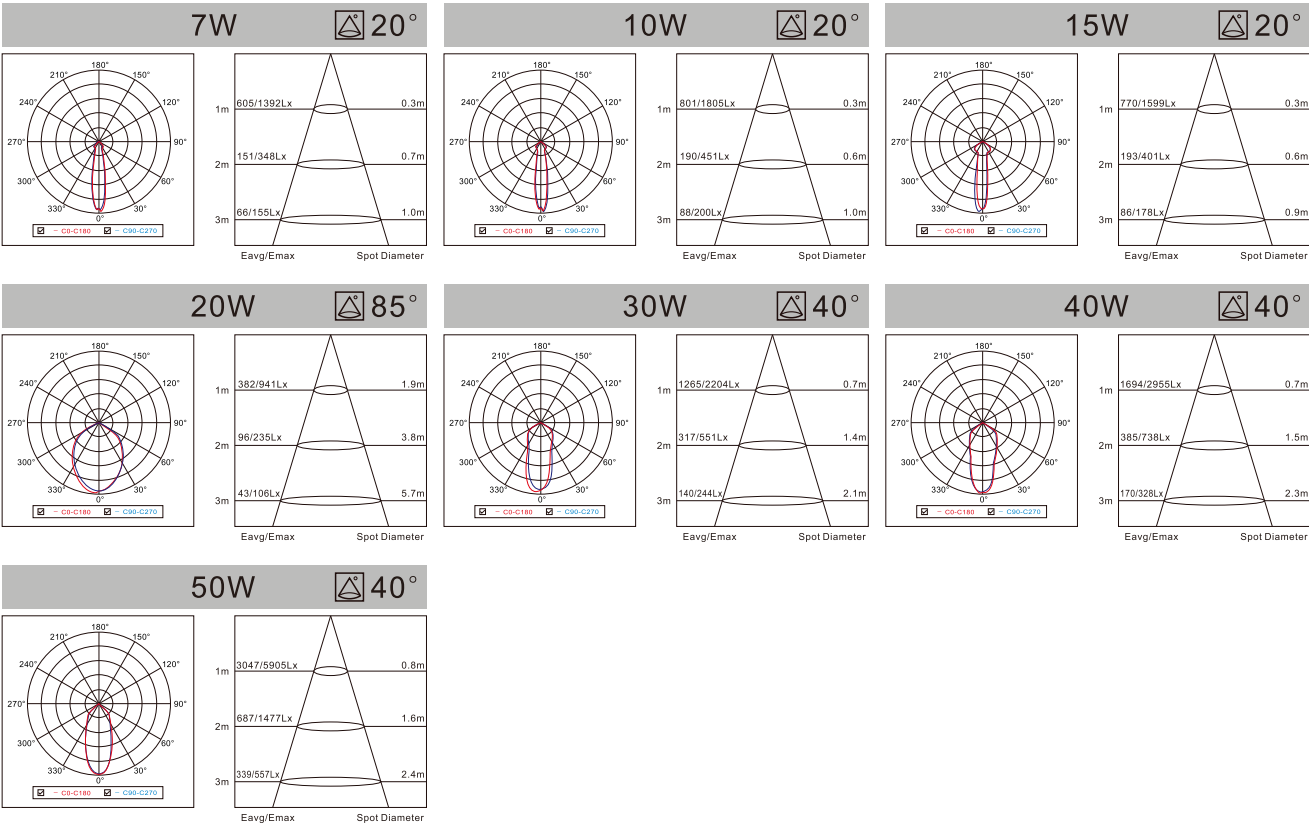

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

LED DOWN LIGHT AC:100/220-240V CRI≥80 H:30000h

IP44



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-COB7BX01     | 7W                | 550-650LM      | N                  | Ø 98x46mm                    | Ø 75-85mm           |
| LP-COB10BX01    | 10W               | 850-950LM      | N                  | Ø 115x47mm                   | Ø 95-105mm          |
| LP-COB15BX01    | 15W               | 1350-1450LM    | N                  | Ø 140x49mm                   | Ø 120-130mm         |



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-COB20BX01    | 20W               | 1750-1900LM    | N                  | Ø 160x50mm                   | Ø 130-150mm         |
| LP-COB30BX01    | 30W               | 2550-2650LM    | N                  | Ø 196x60mm                   | Ø 160-185mm         |
| LP-COB40BX01    | 40W               | 3450-3550LM    | N                  | Ø 225x70mm                   | Ø 180-215mm         |
| LP-COB50BX01    | 50W               | 4350-4450LM    | N                  | Ø 225x95mm                   | Ø 180-215mm         |





EWS SERIES  
LED DOWN LIGHT

CCT Adjustable


LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPDL-05EWS01-Y  | 5W                | 425-500LM      | N                  | Ø 88X28mm                    | Ø 65-80mm           |
| LPDL-08EWS01-Y  | 8W                | 680-720LM      | N                  | Ø 112X30mm                   | Ø 90-100mm          |
| LPDL-12EWS01-Y  | 12W               | 1020-1060LM    | N                  | Ø 175X33mm                   | Ø 145-150mm         |
| LPDL-18EWS01-Y  | 18W               | 1530-1570LM    | N                  | Ø 222X35mm                   | Ø 185-200mm         |

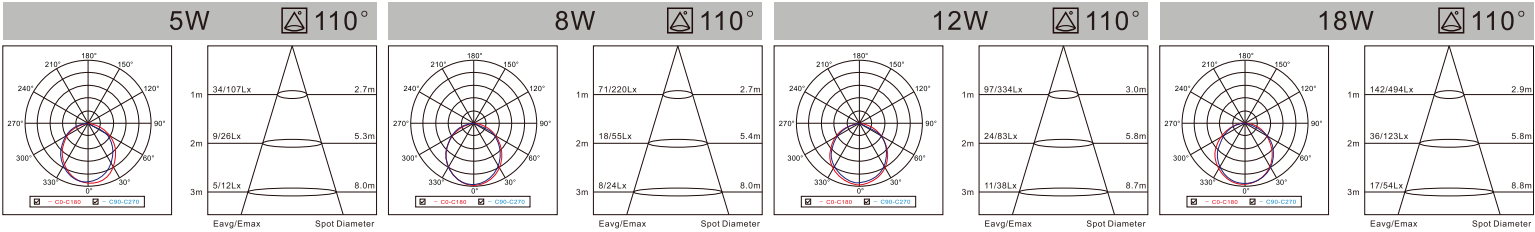

Color Temperature







A/AS SERIES  
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-DL07A01-YX   | ● 7W              | 550-650LM      | N                  | Ø 98x47mm                    | Ø 75-85mm           |
| LP-DL10A01-YX   | ● 10W             | 850-920LM      | N                  | Ø 115x47mm                   | Ø 95-105mm          |
| LP-DL15A01-YX   | ● 15W             | 1350-1450LM    | N                  | Ø 140x51mm                   | Ø 120-130mm         |
| LP-DL20A01-YX   | ● 20W             | 1850-1950LM    | N                  | Ø 180x44mm                   | Ø 160-170mm         |
| LP-DL30A01-YX   | ● 30W             | 2850-2950LM    | N                  | Ø 228x44mm                   | Ø 205-215mm         |
| LP-DL10A01-FX   | ● 10W             | 850-950LM      | N                  | Ø 101x43mm                   | Ø 80-90mm           |
| LP-DL15A01-FX   | ● 15W             | 1350-1450LM    | N                  | Ø 119x43mm                   | Ø 100-110mm         |
| LP-DL20A01-FX   | ● 20W             | 1850-1950LM    | N                  | Ø 140x45mm                   | Ø 120-130mm         |




| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPDL-07AS01-Y   | ● 7W              | 595-635LM      | N                  | Ø 95x26mm                    | Ø 75-85mm           |
| LPDL-12AS01-Y   | ● 12W             | 1020-1060LM    | N                  | Ø 112x28mm                   | Ø 90-100mm          |
| LPDL-20AS01-Y   | ● 20W             | 1700-1740LM    | N                  | Ø 172x28mm                   | Ø 145-150mm         |
| LPDL-30AS01-Y   | ● 30W             | 2550-2590LM    | N                  | Ø 225x28mm                   | Ø 180-200mm         |

Material

High Quality Aviation  
Aluminum

Color Temperature



AS SERIES  
LED DOWN LIGHT



IP65



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPDL-07AS01-YW  | ● 7W              | 595-635LM      | N                  | Ø 95x26mm                    | Ø 75-85mm           |
| LPDL-12AS01-YW  | ● 12W             | 1020-1060LM    | N                  | Ø 112x28mm                   | Ø 90-100mm          |
| LPDL-20AS01-YW  | ● 20W             | 1700-1740LM    | N                  | Ø 172x28mm                   | Ø 145-150mm         |
| LPDL-30AS01-YW  | ● 30W             | 2550-2590LM    | N                  | Ø 225x28mm                   | Ø 180-200mm         |

Color Temperature











LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

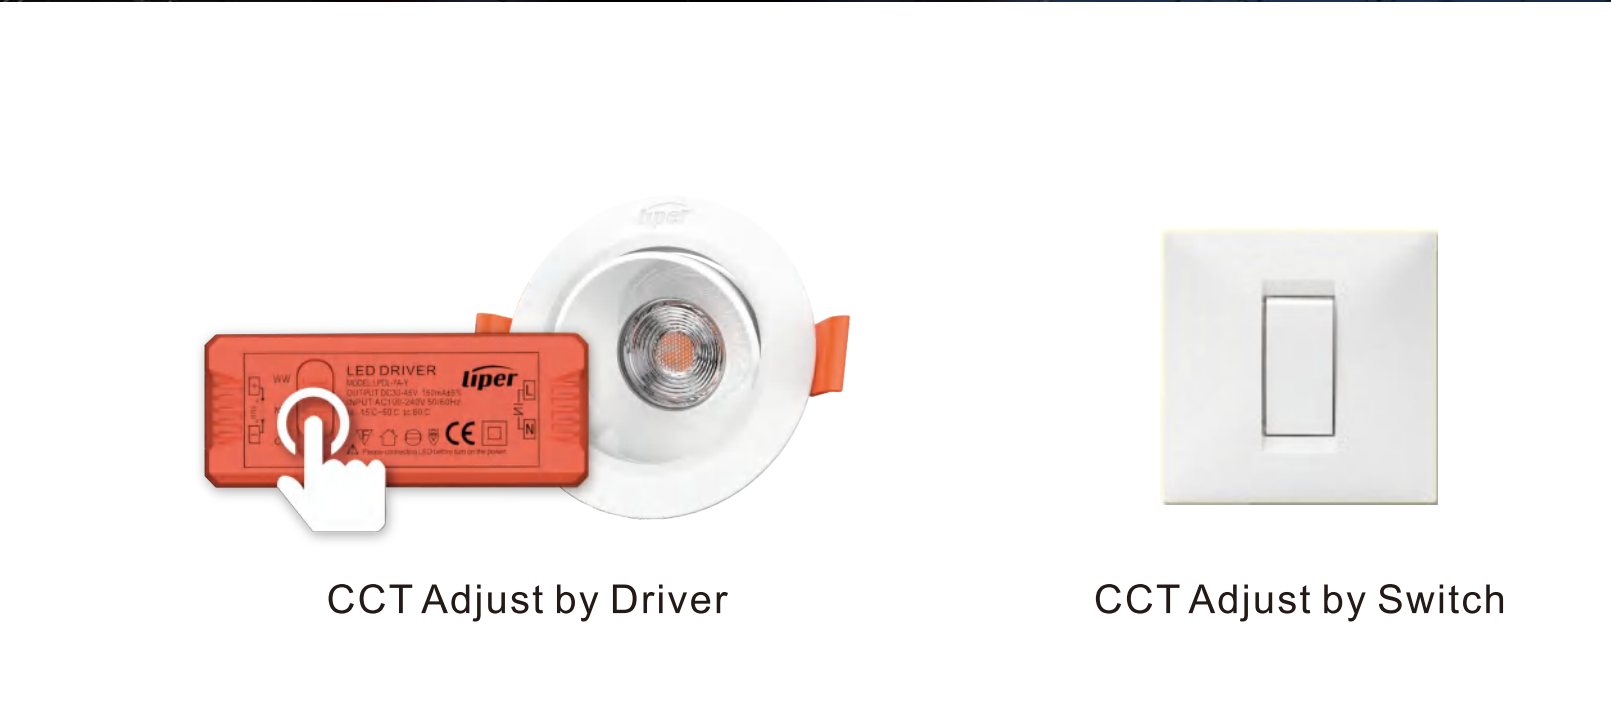

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-CL05G01-Y    | 5W                | 440-480LM      | N                  | Ø88X42mm                     | Ø75-80mm            |
| LP-CL07G01-Y    | 7W                | 570-630LM      | N                  | Ø88X42mm                     | Ø75-80mm            |
| LP-CL10G01-Y    | 10W               | 800-900LM      | N                  | Ø120X52mm                    | Ø95-100mm           |

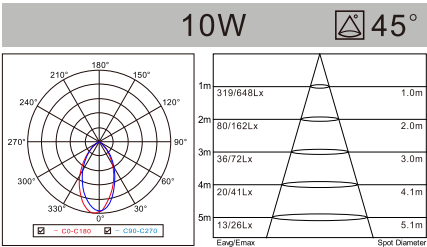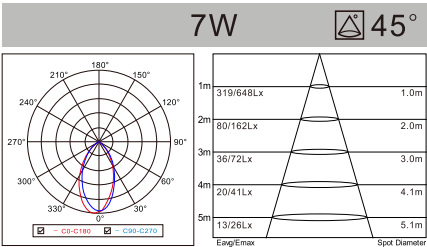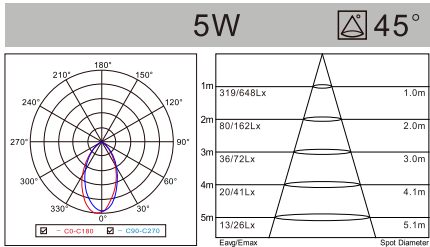

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable





F SERIES  
LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44


ANTI-DAZZLE DESIGN





A

B

BUCKLE DESIGN, SCREW FREE INSTALLATION

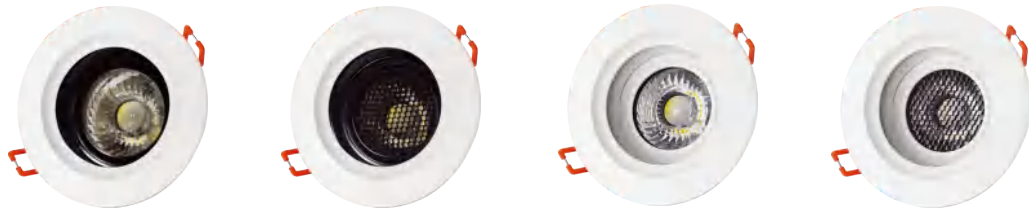

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-COB12FS01    | 12W               | 950-1050LM     | N                  | Ø108x65mm                    | Ø 90-100mm          |
| LP-COB12FS01-W  | 12W               | 950-1050LM     | N                  | Ø108x65mm                    | Ø 90-100mm          |
| LP-COB12FS02    | 12W               | 950-1050LM     | N                  | Ø108x65mm                    | Ø 90-100mm          |
| LP-COB12FS02-W  | 12W               | 950-1050LM     | N                  | Ø108x65mm                    | Ø 90-100mm          |

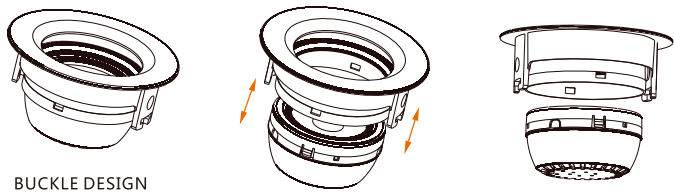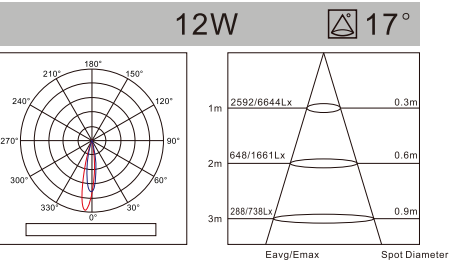

BUCKLE DESIGN  
SCREW FREE INSTALLATION

Material  
High Quality Aviation Aluminum

Color Temperature  
Warm White  
Cool White  
Natural White



F SERIES  
LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



F01 black inner circle  
F02 black inner circle



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LP-COB03F01-F1  | 3W                | 260-310LM      | N                  | Ø 90x35mm                    | Ø 68-80mm           |
| LP-COB03F02-F1  | 3W                | 260-310LM      | N                  | Ø 90x35mm                    | Ø 68-80mm           |
| LP-COB05F01-F1  | 5W                | 350-360LM      | N                  | Ø 90x35mm                    | Ø 68-80mm           |
| LP-COB05F02-F1  | 5W                | 350-360LM      | N                  | Ø 90x35mm                    | Ø 68-80mm           |
| LP-COB08F01-F1  | 8W                | 630-720LM      | N                  | Ø 110x50mm                   | Ø 90-100mm          |
| LP-COB08F02-F1  | 8W                | 630-720LM      | N                  | Ø 110x50mm                   | Ø 90-100mm          |
| LP-COB12F01-F1  | 12W               | 950-1050LM     | N                  | Ø 136x65mm                   | Ø 120-130mm         |
| LP-COB12F02-F1  | 12W               | 950-1050LM     | N                  | Ø 136x65mm                   | Ø 120-130mm         |






F SERIES  
LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



F01 black inner circle  
F02 white inner circle



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|
|-----------------|-------------------|----------------|--------------------|------------------------------|---------------------|

|               |    |           |   |           |        |
|---------------|----|-----------|---|-----------|--------|
| LP-COB03F01-S | 3W | 220-280LM | N | Ø 72x35mm | Ø 60mm |
| LP-COB03F02-S | 3W | 220-280LM | N | Ø 72x35mm | Ø 60mm |

|                |    |           |   |           |           |
|----------------|----|-----------|---|-----------|-----------|
| LP-COB03F01-Y1 | 3W | 260-310LM | N | Ø 90x35mm | Ø 68-80mm |
| LP-COB03F02-Y1 | 3W | 260-310LM | N | Ø 90x35mm | Ø 68-80mm |
| LP-COB05F01-Y1 | 5W | 350-360LM | N | Ø 90x35mm | Ø 68-80mm |
| LP-COB05F02-Y1 | 5W | 350-360LM | N | Ø 90x35mm | Ø 68-80mm |

|                |    |           |   |            |            |
|----------------|----|-----------|---|------------|------------|
| LP-COB08F01-Y1 | 8W | 630-720LM | N | Ø 110x50mm | Ø 90-100mm |
| LP-COB08F02-Y1 | 8W | 630-720LM | N | Ø 110x50mm | Ø 90-100mm |

|                |     |            |   |            |             |
|----------------|-----|------------|---|------------|-------------|
| LP-COB12F01-Y1 | 12W | 950-1050LM | N | Ø 136x65mm | Ø 120-130mm |
| LP-COB12F02-Y1 | 12W | 950-1050LM | N | Ø 136x65mm | Ø 120-130mm |



|                 |    |           |   |           |           |
|-----------------|----|-----------|---|-----------|-----------|
| LP-COB05F01-YT1 | 5W | 310-360LM | N | Ø 90x35mm | Ø 68-80mm |
| LP-COB05F02-YT1 | 5W | 310-360LM | N | Ø 90x35mm | Ø 68-80mm |



10°/20°/30° Selectable

Color Temperature



FS SERIES  
LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h





IP44



| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size | Lochgröße<br>Cutout |
|------------------|-------------------|----------------|--------------------|------------------------------|---------------------|
| LPCOB-04FS01-YB  | 4W                | 320-340LM      | N                  | Ø 40x41                      | Ø 30-35mm           |
| LPCOB-04FS01-YBR | 4W                | 320-340LM      | N                  | Ø 35x41                      | Ø 30mm              |
| LPCOB-04FS01-Y   | 4W                | 320-340LM      | N                  | Ø 40x41                      | Ø 30-35mm           |
| LPCOB-04FS01-YR  | 4W                | 320-340LM      | N                  | Ø 35x41                      | Ø 30mm              |

Color Temperature

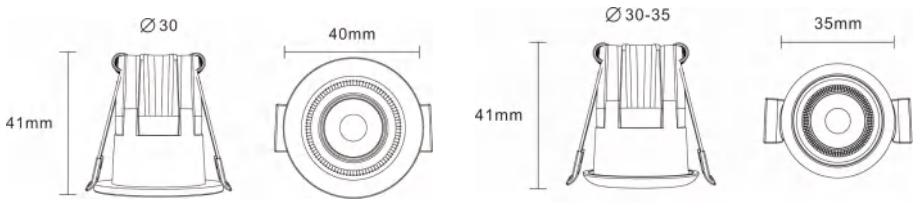





 F SERIES  
LED TRACK LIGHT





## LED TRACK LIGHT

AC:100/220-240V CRI $\geq$ 80 H:30000h



01:black 02:white

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTRL-20F01     | 20W               | 1950-2150LM    | N                  | 93X65X207mm                  |
| LPTRL-30F01     | 30W               | 3325-3675LM    | N                  | 94X75X207mm                  |
| LPTRL-20F02     | 20W               | 1950-2150LM    | N                  | 93X65X207mm                  |
| LPTRL-30F02     | 30W               | 3325-3675LM    | N                  | 94X75X207mm                  |

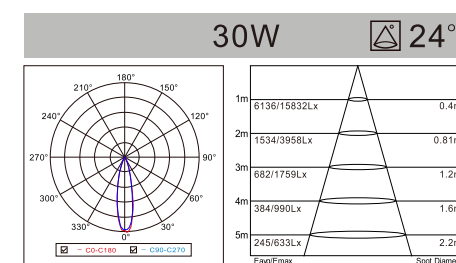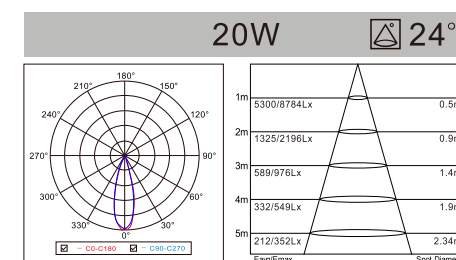

Material Color Temperature

High Quality Aviation Aluminum

Warm White

Cool White

Natural White

CCT Adjustable



ALL IN ONE



2700K 4000K 6500K

 GERMANY LIPER









## LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTRL-20FS01    | 20W               | 1600-1760 LM   | N                  | 93X65X207mm                  |
| LPTRL-30FS01    | 30W               | 2400-2640LM    | N                  | 94X75X207mm                  |
| LPTRL-20FS02    | 20W               | 1600-1760LM    | N                  | 93X65X207mm                  |
| LPTRL-30FS02    | 30W               | 2400-2640LM    | N                  | 94X75X207mm                  |

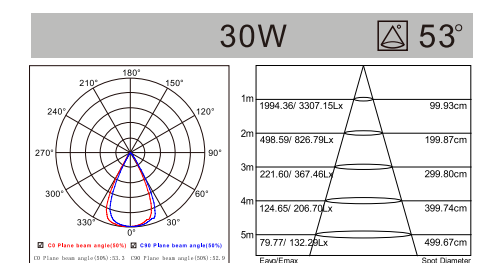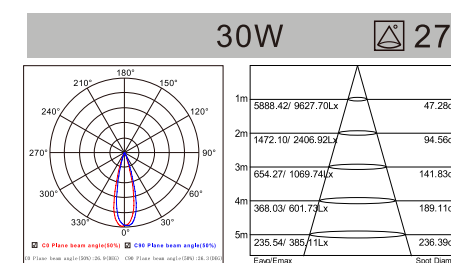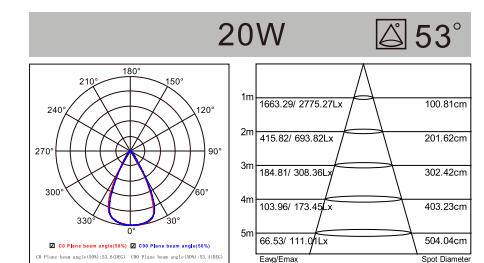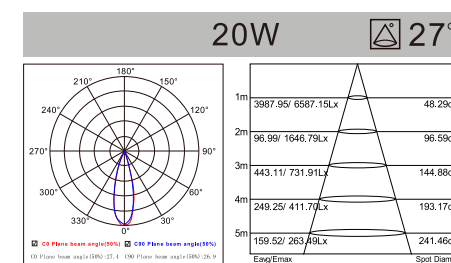

### Material

High Quality Aviation  
Aluminum

### Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable







LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTRL-20FT01    | 20W               | 1600-1760 LM   | N                  | 223*70*63mm                  |
| LPTRL-30FT01    | 30W               | 2400-2640LM    | N                  | 257*70*63mm                  |
| LPTRL-2*20FT01  | 2*20W             | 3200-3520LM    | N                  | 223*70*63mm                  |
| LPTRL-2*30FT01  | 2*30W             | 4800-5280LM    | N                  | 257*70*63mm                  |



01:black 02:white

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTRL-20FT01    | 20W               | 1600-1760 LM   | N                  | 223*70*63mm                  |
| LPTRL-30FT01    | 30W               | 2400-2640LM    | N                  | 257*70*63mm                  |

Material

High Quality Aviation  
Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable








LED LOUVER FITTING

AC:100/220-240V CRI≥80 H:30000h

50W 




40W 





| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LP-LF60A60 40W  | 40W               | 3680-3960LM    | N                  | 600X7X600mm                  |
| LP-LF60A60 50W  | 50W               | 4780-4950LM    | N                  | 600X7X600mm                  |

40W 



50W 

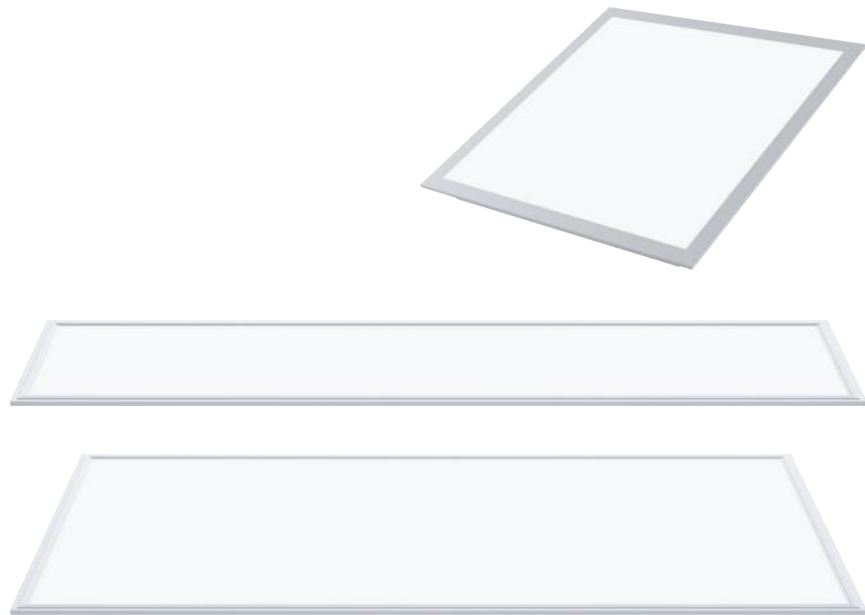

| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------|-------------------|----------------|--------------------|------------------------------|
| LPLF-60EF60 40W  | 40W               | 4200-4400LM    | N                  | 600X600X30mm                 |
| LPLF-60EF60 50W  | 50W               | 5250-5500LM    | N                  | 600X600X30mm                 |
| LPLF-120EF60 80W | 80W               | 8400-8800LM    | N                  | 1200X600X30mm                |
| LPLF-120EF30 40W | 40W               | 4200-4400LM    | N                  | 1200X300X30mm                |

Color Temperature







straight connection



"I" shape connector



Right angle connection








"L" shape connector

## LED TUBE

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTL-08D04      | 8W                | 600-680LM      | N                  | 600X30X37mm                  |
| LPTL-16D04      | 16W               | 1260-1350LM    | N                  | 1200X30X37mm                 |
| LPTL-16D04-2    | 16W               | 1260-1350LM    | N                  | 600X37X63mm                  |
| LPTL-32D04-2    | 32W               | 2550-2670LM    | N                  | 1200X37X63mm                 |

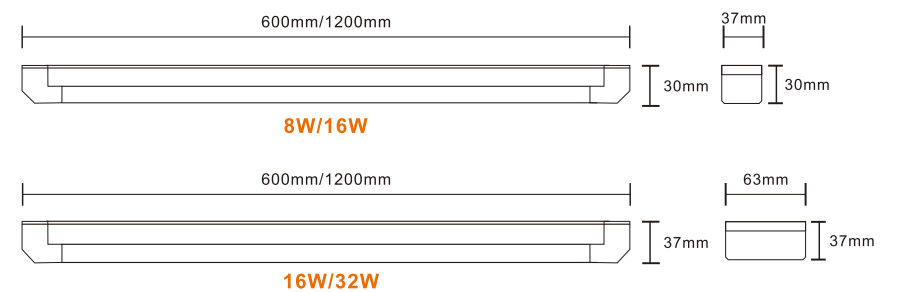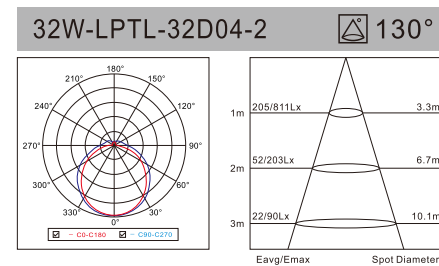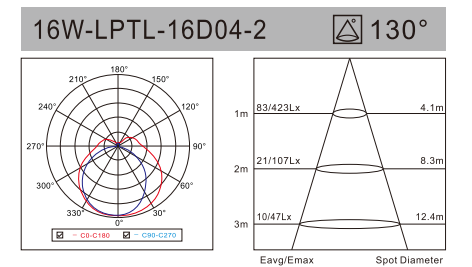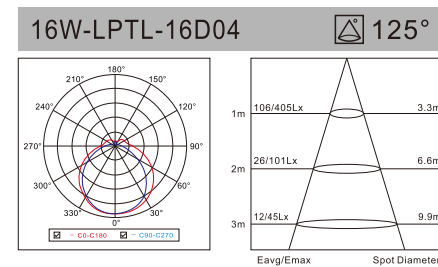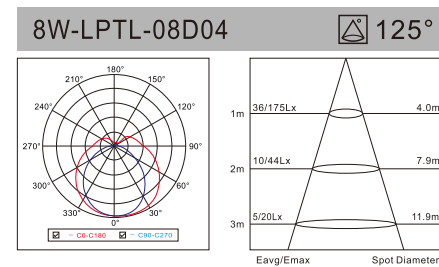

### Color Temperature

Warm White



Cool White



Natural White








T8 SERIES  
LED TUBE

LED TUBE

AC:100/220-240V CRI≥80 H:30000h



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTL-08DS04     | 8W                | 600-680LM      | N                  | 588X26X30mm                  |
| LPTL-16DS04     | 16W               | 1260-1350LM    | N                  | 1198X26X30mm                 |
| LPTL-18DS04-2   | 18W               | 1420-1530LM    | N                  | 588X36X56mm                  |
| LPTL-36DS04-2   | 36W               | 2880-2950LM    | N                  | 1198X36X56mm                 |

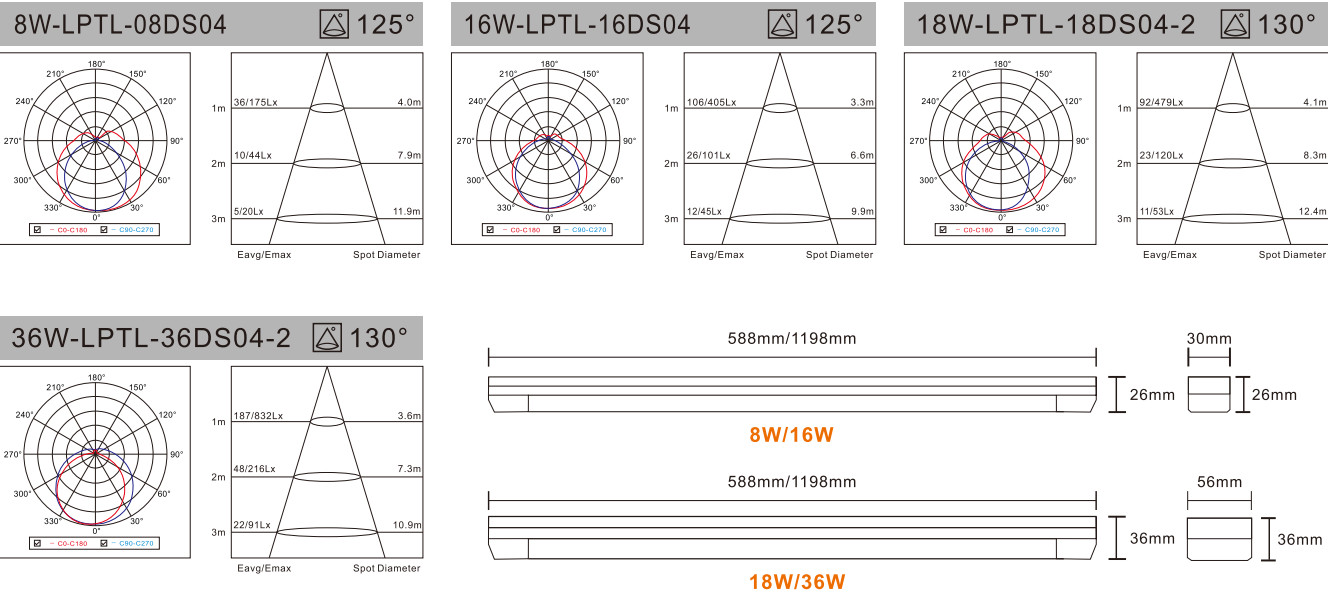

Color Temperature












## T5 SERIES LED TUBE




| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTL04D05       | 4W                | 360-410LM      | N                  | 300x23x35mm                  |
| LPTL08D05       | 8W                | 720-820LM      | N                  | 600x23x35mm                  |
| LPTL12D05       | 12W               | 1050-1200LM    | N                  | 900x23x35mm                  |
| LPTL16D05       | 16W               | 1400-1610LM    | N                  | 1200x23x35mm                 |

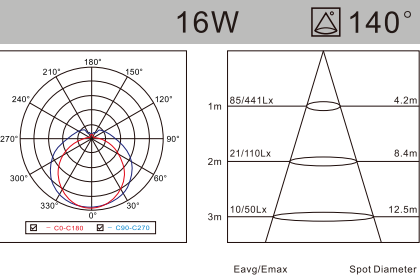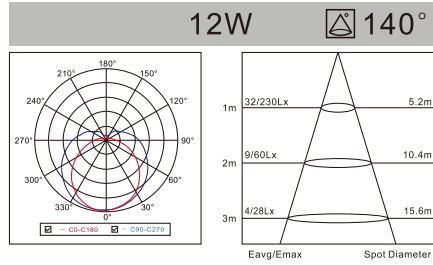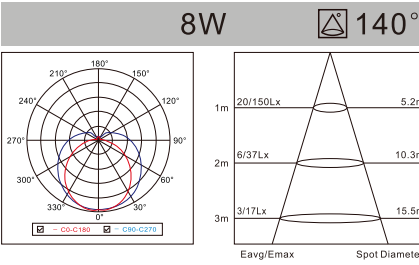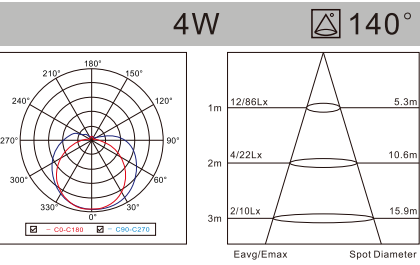

4W/8W/12W/16W




### Color Temperature

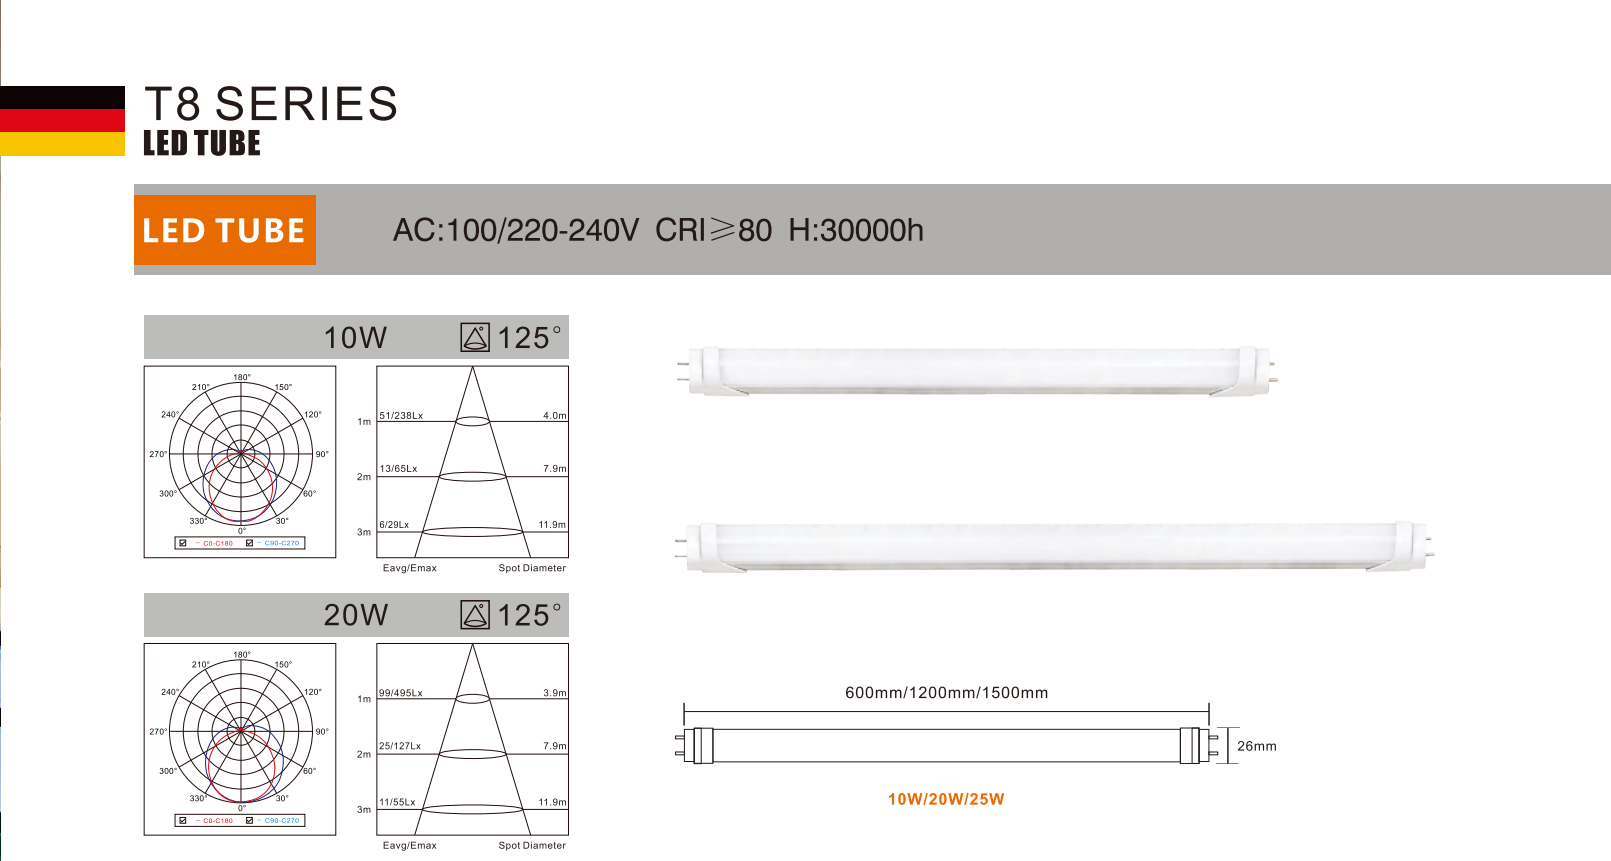

## T8 SERIES LED TUBE




### LED TUBE

AC:100/220-240V CRI≥80 H:30000h

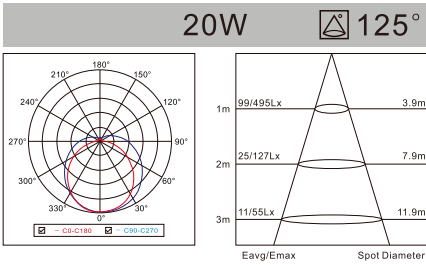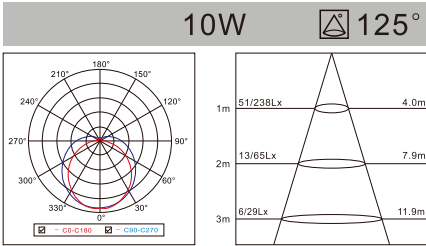

10W/20W/25W

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTL10C02       | 10W               | 800-900LM      | N                  | Ø 26x600mm                   |
| LPTL20C02       | 20W               | 1600-1800LM    | N                  | Ø 26x1200mm                  |

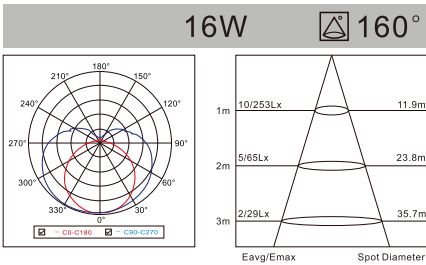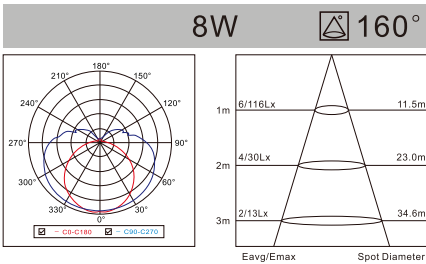


8W/16W

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPTL08E02       | 8W                | 720-880LM      | N                  | Ø 26x600mm                   |
| LPTL16E02       | 16W               | 1440-1760LM    | N                  | Ø 26x1200mm                  |


### Color Temperature






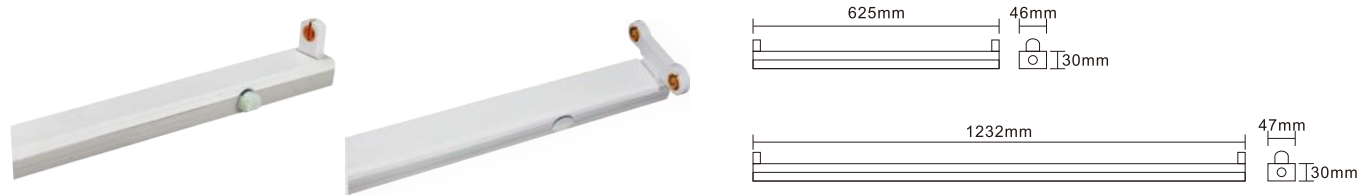

| Modell<br>Model         | Produktgröße<br>Product Size |
|-------------------------|------------------------------|
| CW.A 600mm Single Tube  | 625x46x30mm                  |
| CW.A 1200mm Single Tube | 1232x47x30mm                 |
| CW.B 600mm Double Tube  | 625x46x30mm                  |
| CW.B 1200mm Double Tube | 1232x47x30mm                 |

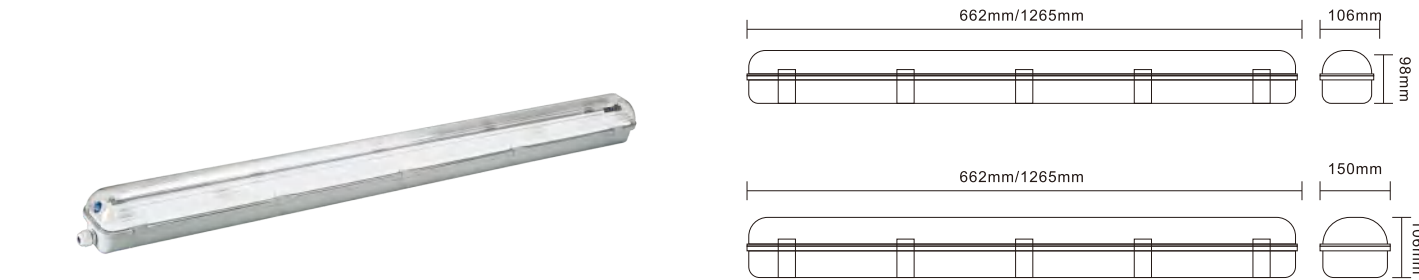

| Modell<br>Model             | Produktgröße<br>Product Size |
|-----------------------------|------------------------------|
| SY6118-H 600mm Single Tube  | 662x98x106mm                 |
| SY6136-H 1200mm Single Tube | 1265x98x106mm                |
| SY6218-H 600mm Double Tube  | 662x106x150mm                |
| SY6236-H 1200mm Double Tube | 1265x106x150mm               |

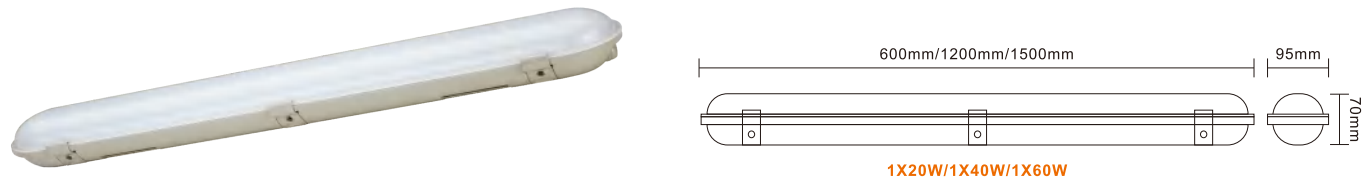


| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| SY6120-H(LED)   | 1X20W             | 1650-1750LM    | N                  | 600X70X95mm                  |
| SY6140-H(LED)   | 1X40W             | 3350-3450LM    | N                  | 1200X70X95mm                 |
| SY6160-H(LED)   | 1X60W             | 5550-5650LM    | N                  | 1500X70X95mm                 |

### LED STRIPLIGHT

AC: 220-240V CRI≥80 H:30000h



## IP65 AC 220-240V

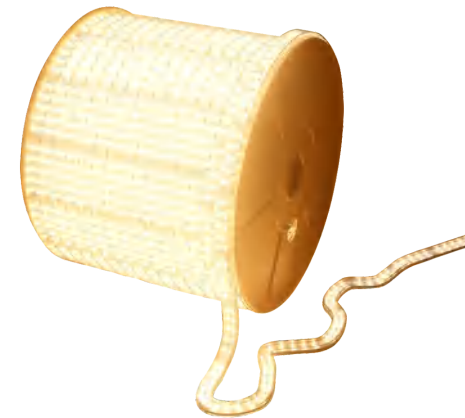

Power Supply  
Carry 50M

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPSL-7A01       | 7W/M              | 700LM/M        | N                  | 8mm                          |
| LPSL-12A01      | 12W/M             | 1200LM/M       | N                  | 11mm                         |

## IP20 DC24V

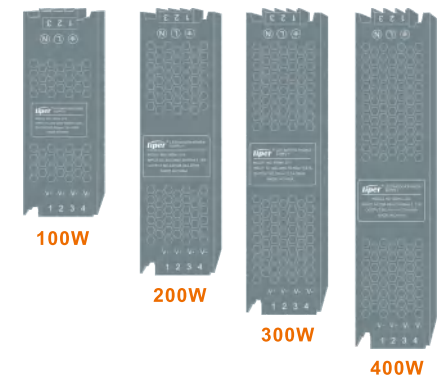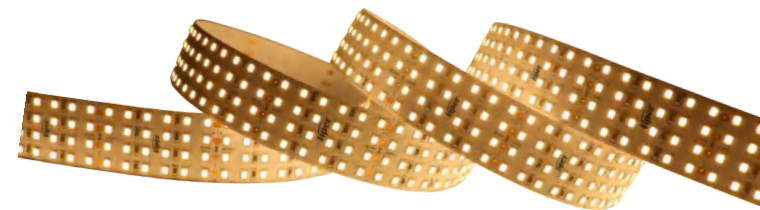

| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPSTL-20A01     | 20W/M             | 2400LM/M       | N                  | 10mm                         |
| LPSTL-25A01     | 25W/M             | 3000LM/M       | N                  | 15mm                         |
| LPSTL-30A01     | 30W/M             | 3600LM/M       | N                  | 28mm/30mm                    |
| LPSTL-40A01     | 40W/M             | 4800LM/M       | N                  | 40mm                         |

Color Temperature

Warm White



Cool White



Natural White







A SERIES  
LED STRIP LIGHT

LED STRIPLIGHT

AC: 220-240V CRI≥80 H:30000h

IP20  
DC24V  
COB



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPSTL-11A01     | ● 11W/M           | 1100LM/M       | N                  | 8MM                          |

IP68  
DC24V



| Modell<br>Model | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-----------------|-------------------|----------------|--------------------|------------------------------|
| LPSTL-10A01     | ● 10W/M           | 1250LM/M       | N                  | 8MM                          |

Color Temperature



CX SERIES  
LED Magnetic Track light







CX SERIES  
LED Magnetic Track light

LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h



| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------|-------------------|----------------|--------------------|------------------------------|
| LP-CX-20CB-FG-10 | 10W               | 850-935LM      | N                  | 304X22X45mm                  |
| LP-CX-20CB-FG-20 | 20W               | 1700-1785LM    | N                  | 604X22X45mm                  |
| LP-CX-20CB-FG-30 | 30W               | 2550-2635LM    | N                  | 904X22X45mm                  |



| Modell<br>Model  | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|------------------|-------------------|----------------|--------------------|------------------------------|
| LP-CX-20CB-GS-6  | 6W                | 510-595LM      | N                  | 134X22X45mm                  |
| LP-CX-20CB-GS-12 | 12W               | 1020-1105LM    | N                  | 220X22X46mm                  |
| LP-CX-20CB-GS-18 | 18W               | 1530-1615LM    | N                  | 328X22X47mm                  |
| LP-CX-20CB-GS-24 | 24W               | 2040-2125LM    | N                  | 435X22X47mm                  |

Color Temperature



CX SERIES  
LED Magnetic Track light

LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h



| Modell<br>Model   | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|-------------------|-------------------|----------------|--------------------|------------------------------|
| LP-CX-20CB-DG2-10 | 10W               | 850-935LM      | N                  | 46X162mm                     |
| LP-CX-20CB-DG2-20 | 20W               | 1700-1785LM    | N                  | 56X196mm                     |
| LP-CX-20-HS-12    | 12W               | 1020-1080LM    | N                  | 40X300mm                     |



| Modell<br>Model     | Leistung<br>Power | Lumen<br>Lumen | Verdunklung<br>DIM | Produktgröße<br>Product Size |
|---------------------|-------------------|----------------|--------------------|------------------------------|
| LP-CX-20CB-GS-ZD-6  | 6W                | 510-595LM      | N                  | 134X22X85mm                  |
| LP-CX-20CB-GS-ZD-12 | 12W               | 1020-1105LM    | N                  | 220X22X85mm                  |
| LP-CX-20CB-GS-ZD-18 | 18W               | 1530-1615LM    | N                  | 328X22X85mm                  |
| LP-CX-20CB-GS-ZD-24 | 24W               | 2040-2125LM    | N                  | 435X22X85mm                  |

Color Temperature

